


Power Divider/Combiner 2 Way 2.92mm 50Ω DC to 40 GHz

PD2-K2-1-40G_A

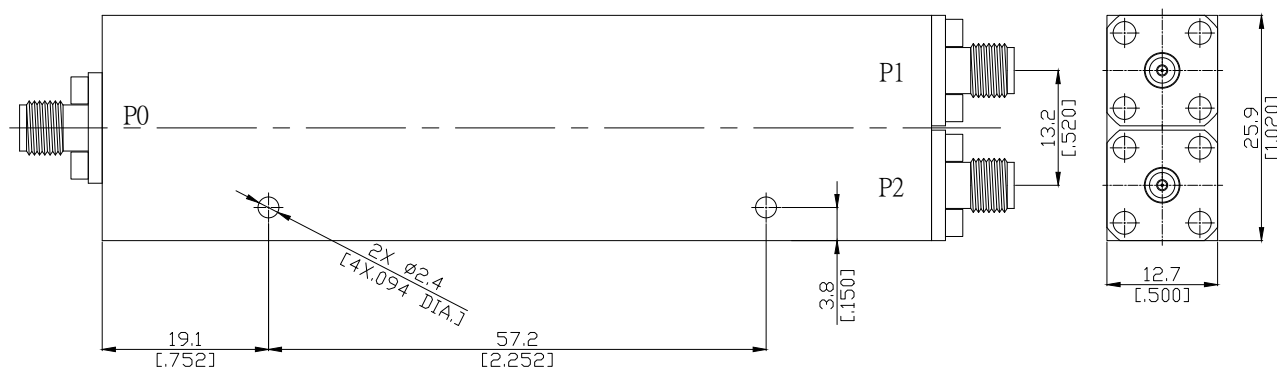

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 61169-35

Electrical Data

Impedance 50 Ω
Frequency DC to 40 GHz
VSWR (Return Loss) ≤ 1.15 (≥ 23.1 dB)
Insertion Loss ≤ 2.1 dB
Isolation ≥ 16 dB
Amplitude Balance ≤ ± 0.4 dB
Phase Balance ≤ ± 6°
Power Handling 20Watt

Environmental Data

Temperature Range -55°C to +85°C
RoHS compliant

Packing

Single or 100