


Power Divider/Combiner 2 Way 2.92mm 50Ω 15 to 40 GHz

PD2-K2-15-40G_A

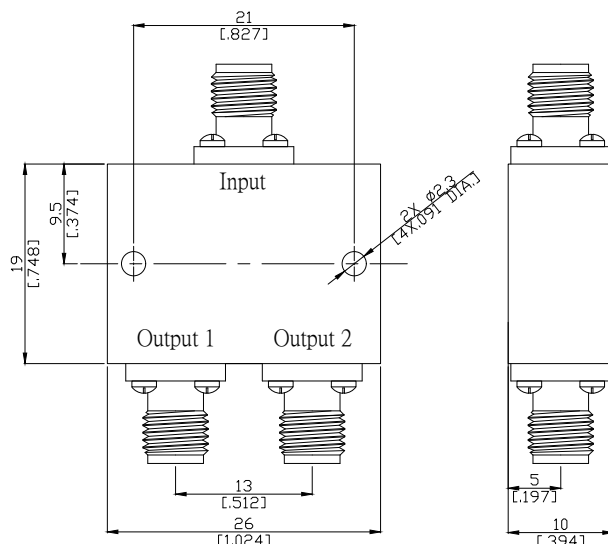

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-35

Electrical Data

Impedance

50 Ω

Frequency

15 to 40 GHz

VSWR (Return Loss)

≤ 1.8 (≥ 10.9 dB)

Insertion Loss

≤ 1.5 dB

Isolation

≥ 15 dB

Amplitude Balance

≤ ± 0.5 dB

Phase Balance

≤ ± 6°

Power Handling

30Watt

Environmental Data

Temperature Range

-55°C to +85°C

RoHS

compliant

Packing

Single or 100