




**4 Way SMA Jack (Female)
Wilkinson Power Divider
From 2 GHz to 18 GHz Rated at 20 Watts**

PD4-A2-2-18G_A

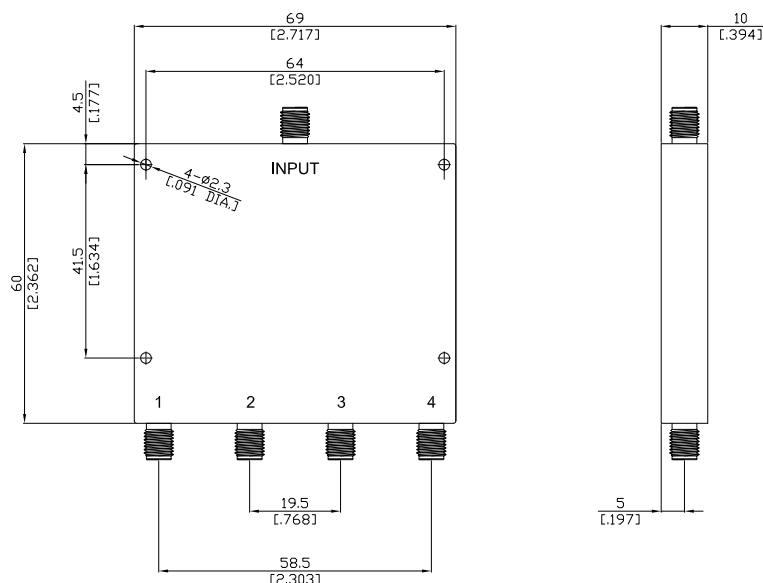

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Electrical Data

Signal Band 1	
Impedance	50 Ω
Frequency	2 to 18 GHz
Input VSWR	≤ 1.70
Output VSWR	≤ 1.5
Insertion loss	≤ 2.6 dB
Amp. Balance	± 0.5 dB
Phase Balance	$\pm 10^\circ$
Isolation	≥ 15 dB
Max. Composite Power	20 W

Input 1	
Connector Type	SMA
Gender	Jack (Female)

	Output 1	Output 2	Output 3	Output 4
Connector Type	SMA	SMA	SMA	SMA
Gender	Jack (Female)	Jack (Female)	Jack (Female)	Jack (Female)

Mechanical Data

Dimensions 60 x 69 x 10 mm (Length x Width x Height)
Weigh N/A

Environmental Data

Temperature range -45°C to +85°C
RoHS compliant

Packing

Single