


## SMA Terminations Plug with Chain

T-A15-12.4G1WA-88.9/9XX

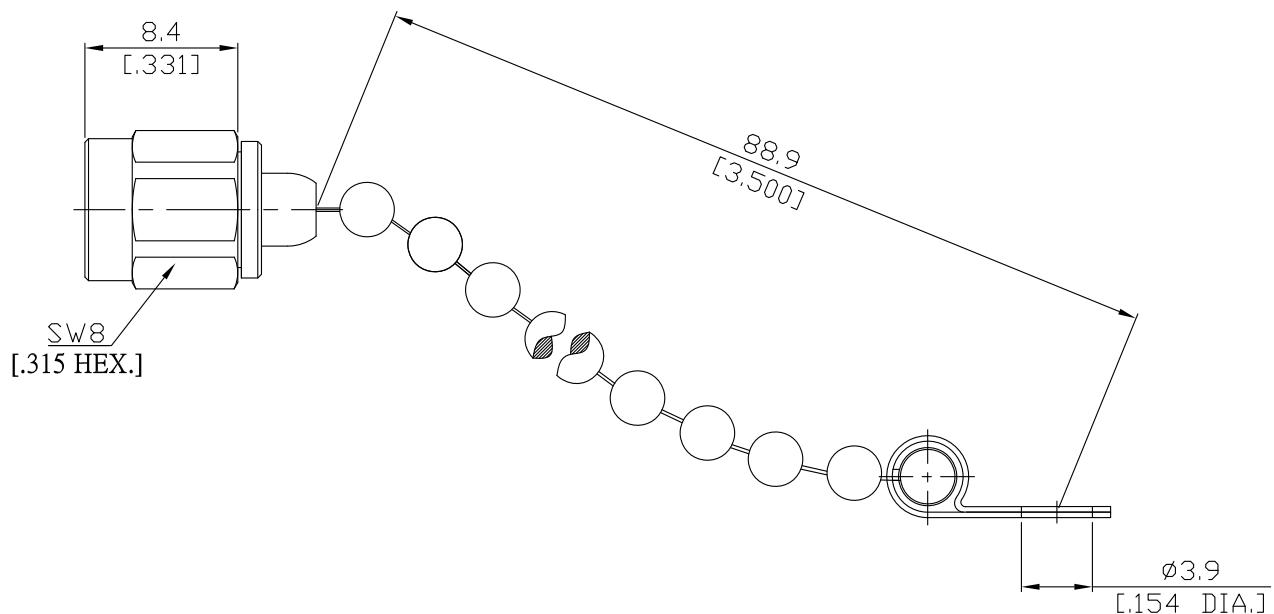

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 60169-15; MIL-C-39012; MIL-STD-348A/310

**Electrical Data**

Impedance

50 Ω

Interface frequency max.

DC to 12.4 GHz

VSWR (Return loss)

≤ 1.20 (≥ 20.83 dB)

Power rating (Watt)

1 W

**Mechanical Data**

Coupling mechanisms

Screw-lock

Weight

0.0053 kg

**Environmental Data**

Temperature range

-55°C to +125°C

RoHS

compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated

**Packing**

Single or 100