




SMA Terminations Plug

T-A15-18G2WA/91X

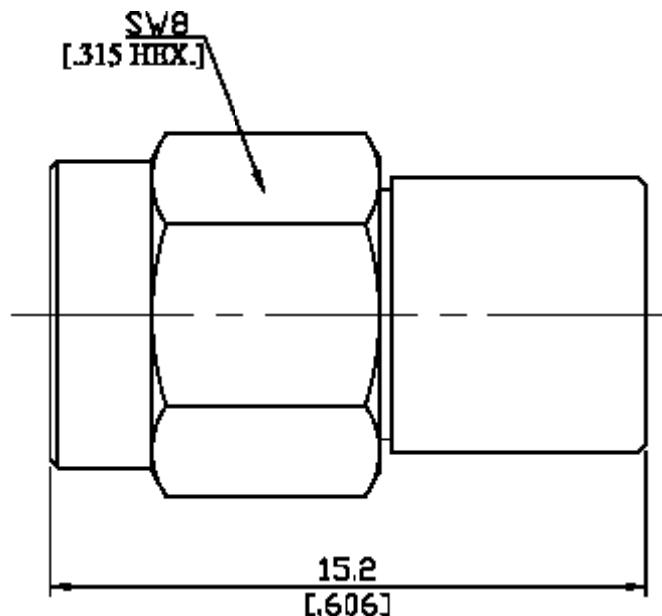

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-15, MIL-STD-348A/310

Electrical Data

Impedance 50 Ω
Interface frequency max. DC to 18 GHz
VSWR (Return Loss) ≤ 1.15 (≥ 23.13)
Power rating (Watt) 2 W

Mechanical Data

Coupling mechanisms Screw-lock
Weight 0.0053 kg

Environmental Data

Temperature range -55 °C to +125 °C
RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated

Packing

Single or 100