


SMA Plug (Male) Termination With Chain DC-18 GHz; 2Watt; VSWR1.2

T-A15-18G2WB-88.9 / 9XX

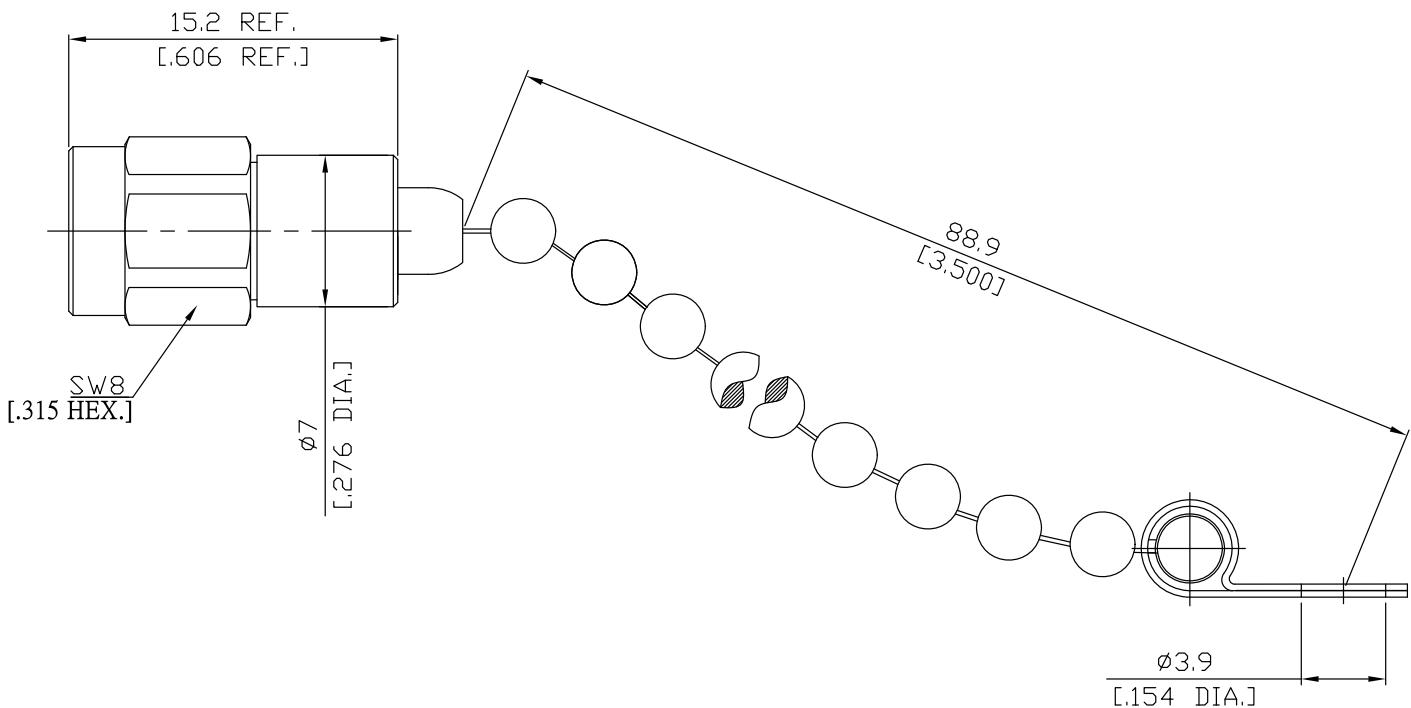

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-15;CECC 22110; MIL-PRF-39012 SMA; MIL-STD-348/310

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.2 (≥ 20.83 dB)

Average power (at 25°C)

2 W

derated linearly to 0.2 watt @ 100°C.

500 watts peak (5 µsec pulse width; 0.2% duty cycle)

Material And Plating

| Piece Parts | Material | Plating |
|----------------|------------------|---|
| Centre Contact | Beryllium Copper | Gold plating (Non-magnetic nickel-phosphorus underplating) |
| Body | Stainless Steel | Passivated |
| Insulator | PTFE | |
| Gasket | Silicone Rubber | |
| Coupling Nut | Stainless Steel | Passivated |
| Chain | Stainless Steel | Passivated |

SMA Plug (Male) Termination With Chain DC-18 GHz; 2Watt; VSWR1.2

T-A15-18G2WB-88.9 / 9XX

Mechanical Data

| | |
|----------------------------------|------------------|
| Coupling mechanisms | Screw-lock |
| Mating Cycles | ≥ 500 |
| Coupling Nut Retention | ≥ 270 N |
| Center Contact Captivation:axial | ≥ 20 N |
| Coupling Test Torque | 1.70 Nm max. |
| Recommended Torque | 0.8 Nm to 1.1 Nm |

Environmental Data

| | |
|---------------------|--------------------------------------|
| Temperature Range | -55°C to +125°C |
| Thermal shock | MIL-STD-202, Method 107, Condition B |
| Corrosion | MIL-STD-202, Method 101, Condition B |
| Vibration | MIL-STD-202, Method 204, Condition D |
| Shock | MIL-STD-202, Method 213, Condition I |
| Moisture Resistance | MIL-STD-202, Method 106 |
| RoHS | compliant |

Packing

Single or 100