


## SMA (Male) Terminations Plug DC-18 GHz, 2W

T-A15-18G2WB/H11

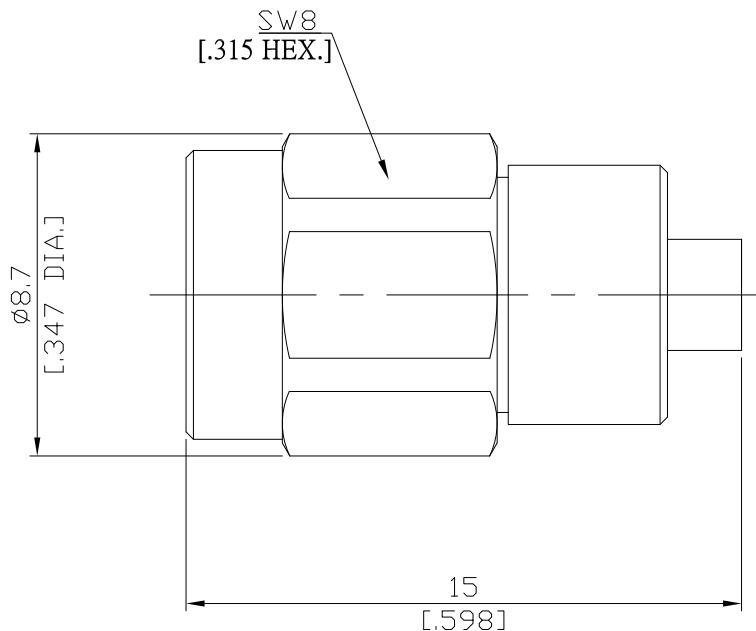

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 60169-15; MIL-STD-348B/310

**Electrical Data**

Impedance

50 Ω

Interface frequency max.

DC to 18 GHz

VSWR (Return Loss)

≤ 1.15 (≥ 23.13 dB)

Power rating (Watt)

2 W

**Mechanical Data**

Coupling mechanisms

Screw-lock

Weight

N/A

**Environmental Data**

Temperature range

-55 °C to +125 °C

RoHS

compliant

**Material And Plating**

## Piece Parts

## Material

## Plating

Centre contact

Phosphor Bronze

Gold plating(Nickel underplated)

Body

Brass

Gold plating(Nickel underplated)

Insulator

PTFE

Gasket

Silicone Rubber

Coupling nut

Brass

Gold plating(Nickel underplated)

**Packing**

Single or 100