


2 Watt Termination Up to 18 GHz  
SMA Plug (Male)

T-A15-18G2WD / 9XX

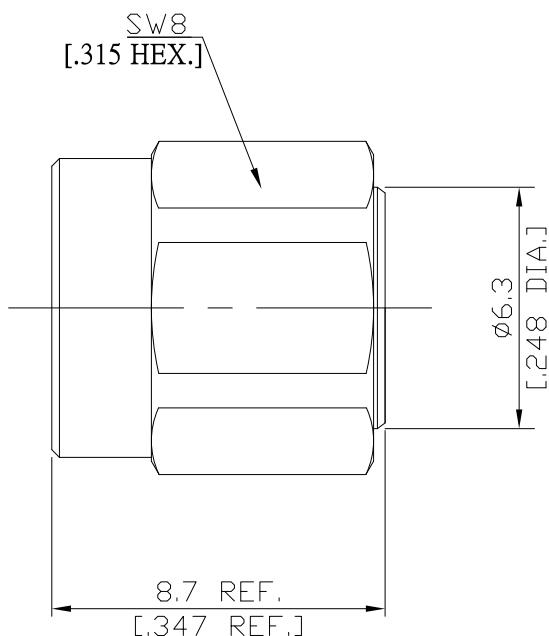

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 60169-15;CECC 22110; MIL-PRF-39012 SMA; MIL-STD-348/310

**Electrical Data**

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.2 ( $\geq$  20.83 dB)

Average power (at 25 °C)

2 W

**Material And Plating**

Piece Parts	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Passivated

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Rosnol RF/Microwave Technology Co., Ltd.  
[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)Date:  
DEC/20/2024Phone: +886-3-463-5095 / Fax: +886-3-463-5952  
N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

2 Watt Termination Up to 18 GHz  
SMA Plug (Male)

## T-A15-18G2WD / 9XX

## Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Coupling Test Torque	1.70 Nm max.
Recommended Torque	0.9 Nm

## Environmental Data

Temperature Range	-55°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

## Packing

Single or 100