


SMA Plug (Male) Termination, 2 W, DC-6 GHz, VSWR 1.15

T-A15-6G2WA / 111

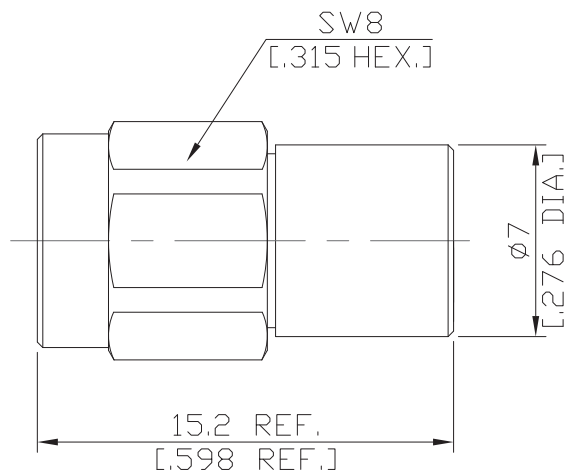

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-15; CECC 22110; MIL-PRF-39012; MIL-STD-348B/310; EN 122110

Electrical Data

Impedance

50 Ω

Frequency

DC to 6 GHz

VSWR (Return Loss)

≤ 1.15 (≥ 23.13 dB)

Average Power (at 25°C)

2 W

Material And Plating

Piece Parts	Material	Plating
Centre Contact	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)

Mechanical Data

Coupling Mechanisms

Screw-On

Mating Cycles

≥ 500

Coupling Test Torque

max. 1.70 Nm

Recommended Torque

0.57 Nm

Environmental Data

Temperature Range

-55°C to +125°C

RoHS

Compliant

Packing

Single or 100