




SMA Terminations Plug

T-A15-6G2WA/H11

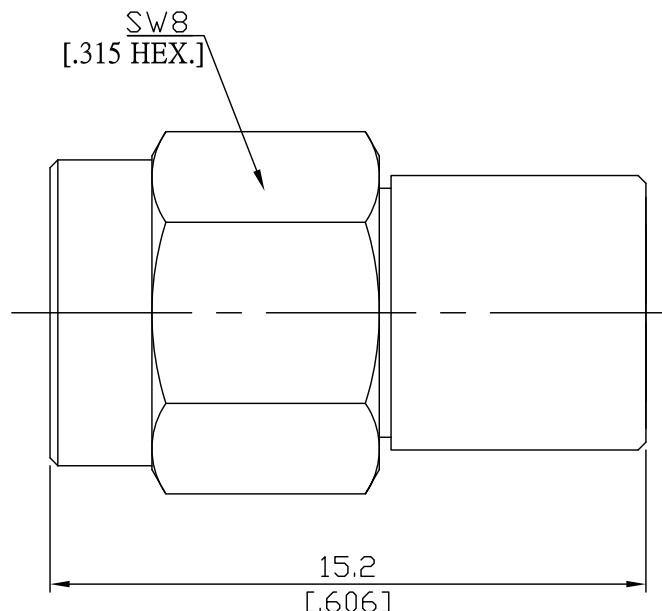

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to IEC 60169-15; MIL-C-39012; MIL-STD-348A/310

**Electrical Data**

Impedance 50 Ω

Interface frequency max. DC to 6 GHz

VSWR (Return loss) ≤ 1.15 ( $\geq 23.13$  dB)

Power rating (Watt) 2 W

**Mechanical Data**

Coupling mechanisms Screw-lock

Weight 0.0053 kg

**Environmental Data**

Temperature range -55 °C to +125 °C

RoHS compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Gold plating(Nickel underplated)

**Packing**

Single or 100