




SMA(Male) Termination Plug

T-A15-6G5WA/H33

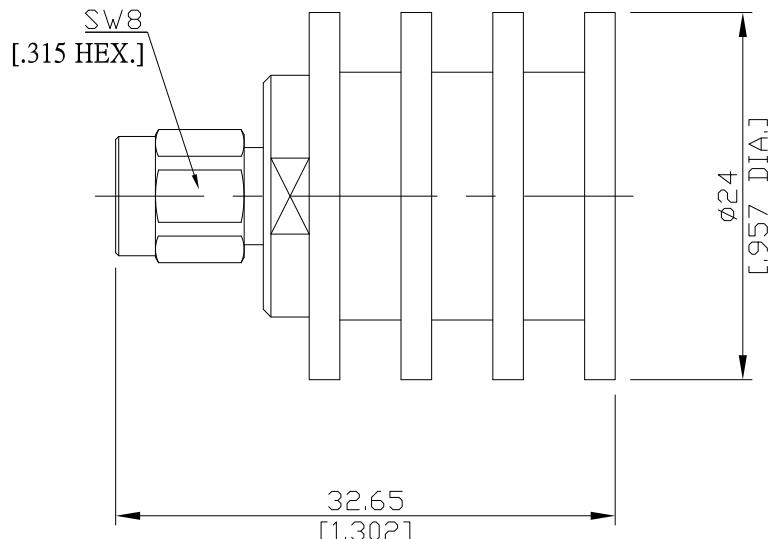

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-15; MIL-STD-348A/310

Natural Convection Cooling Designed

According to MIL-DTL-39030

Electrical Data

Impedance	50 Ω
Frequency	DC to 6 GHz
VSWR (Return loss)	≤ 1.20 (≥ 20.83 dB)
Power rating (Watt)	5 W at 25°C

Mechanical Data

Coupling mechanisms	Screw-lock
Weight	N/A

Environmental Data

Temperature range	-55°C to +125°C
RoHS	compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Nickel
Heatsinks	Aluminum	Black anodized

Packing

Single or 100