




SMA Jack (Female) Termination
with Chain

T-A25-18G2WA-88.9/9X

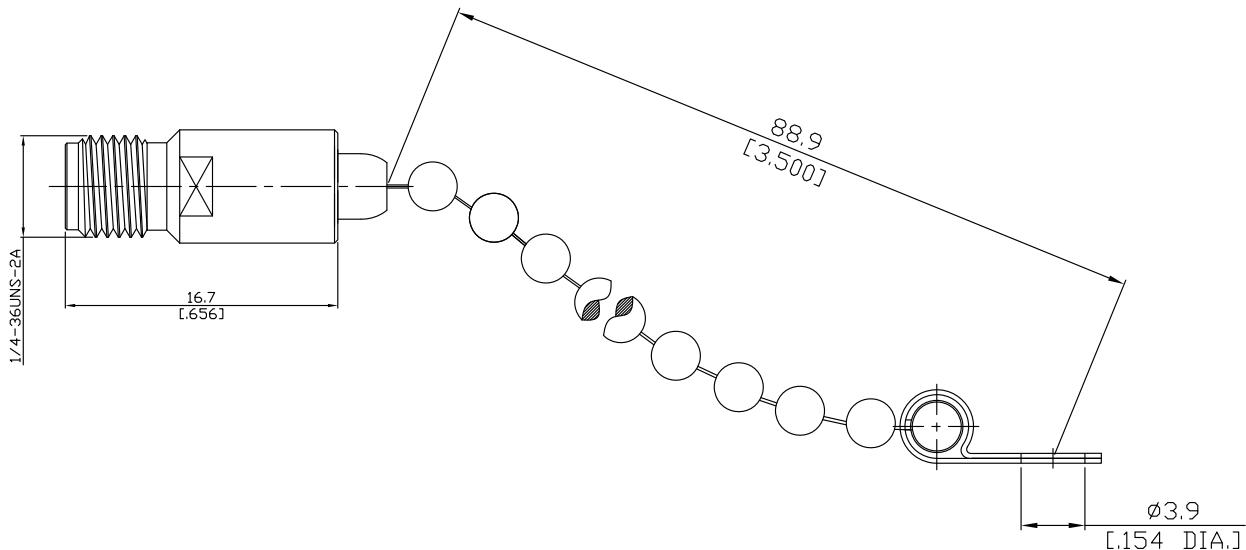

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

MIL-STD-348A/310

IEC 60169-15

Electrical Data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR	≤ 1.20

Mechanical Data

Coupling mechanisms	Screw-lock
Weight	N/A

Environmental Data

Temperature range	-65 °C to +165 °C
RoHS	compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Gasket	Silicone Rubber	
Chain	Stainless Steel	Passivated

Packing

Single or 100