




BNC Terminations Plug

T-B15-2G2WA/133

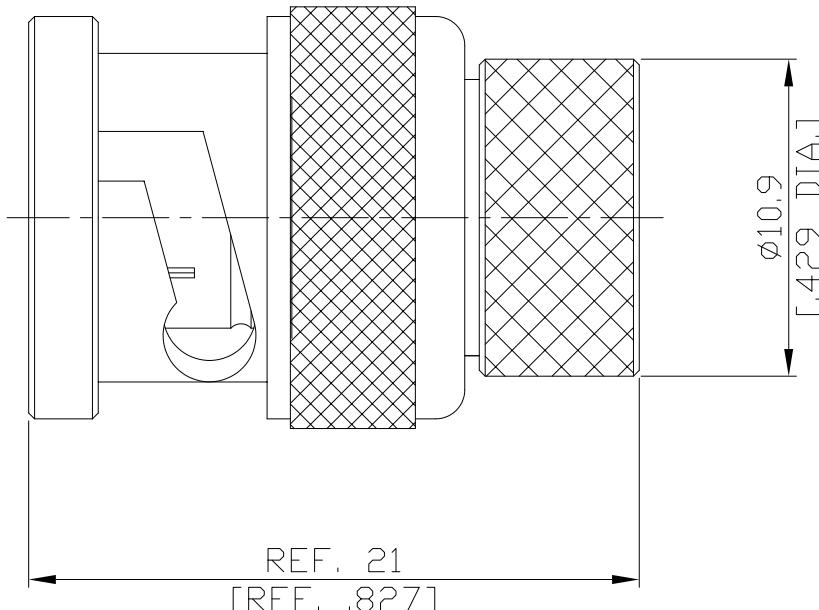

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-8; MIL-C-39012; MIL-STD-348A/301

Electrical Data

Impedance	50 Ω
Interface frequency max.	DC to 2 GHz
VSWR	≤ 1.2
Power rating (Watt)	2 W

Mechanical Data

Coupling mechanisms	Bayonet-lock
Weight	N/A

Environmental Data

Temperature range	-55 °C to +125 °C
RoHS	compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Brass	Gold plating (Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Nickel

Packing

Single or 100