




BNC Terminations Plug

T-B15-2G2WA/144

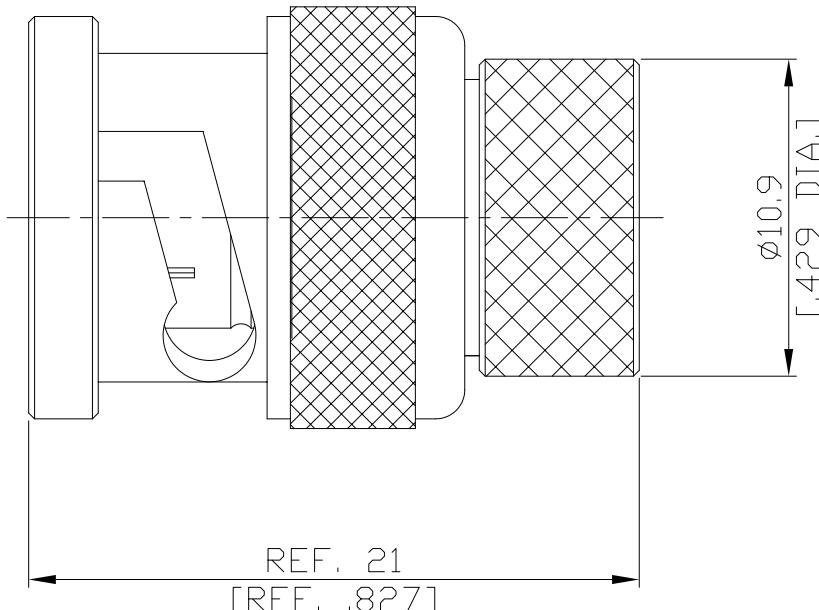

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-8; MIL-C-39012; MIL-STD-348A/301

Electrical Data

Impedance	50 Ω
Interface frequency max.	DC to 2 GHz
VSWR	≤ 1.2
Power rating (Watt)	2 W

Mechanical Data

Coupling mechanisms	Bayonet-lock
Weight	N/A

Environmental Data

Temperature range	-55 °C to +125 °C
RoHS	compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Brass	Gold plating (Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy

Packing

Single or 100