


## BNC Plug (Male) Termination DC-4 GHz VSWR1.2

## T-B15-4G1W / 144

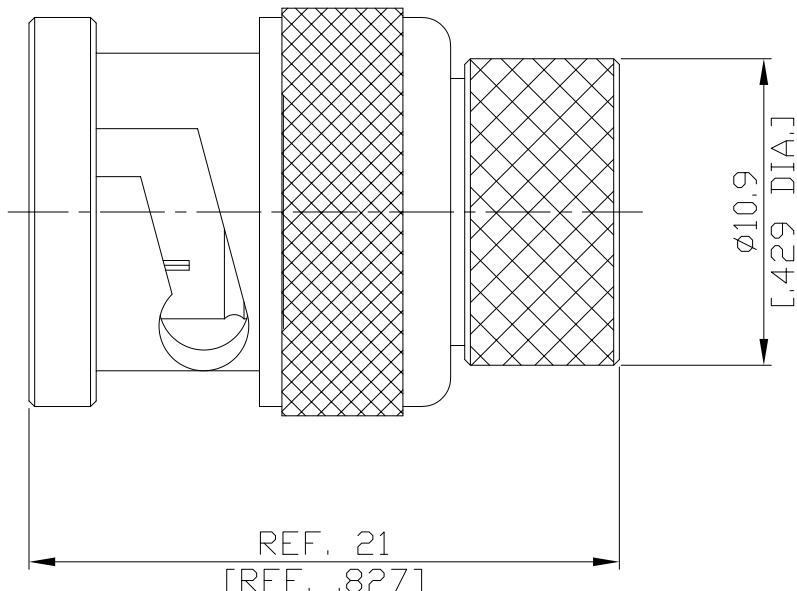

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to

IEC 60169-8, MIL-STD-348B/301

### Electrical Data

Impedance

50 Ω

Frequency

DC to 4 GHz

VSWR (Return Loss)

≤ 1.2 (≥ 20.83 dB)

Average power (at 25°C)

1 W

### Material And Plating

Piece Parts (BNC)	Material	Plating
Centre Contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Brass	Copper-Tin-Zinc Alloy

BNC Plug (Male) Termination DC-4 GHz VSWR1.2

**T-B15-4G1W / 144**

**Mechanical Data**

Coupling mechanisms	Bayonet-lock
Mating Cycles	≥ 500
Coupling Nut Retention	N/A
Center Contact Captivation: axial	≥ 27 N

**Environmental Data**

Temperature Range	-60°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition G
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

**Packing**

Single or 100