




**BNC (Male) Terminations Plug**

**T-B17-1G1WA/144**

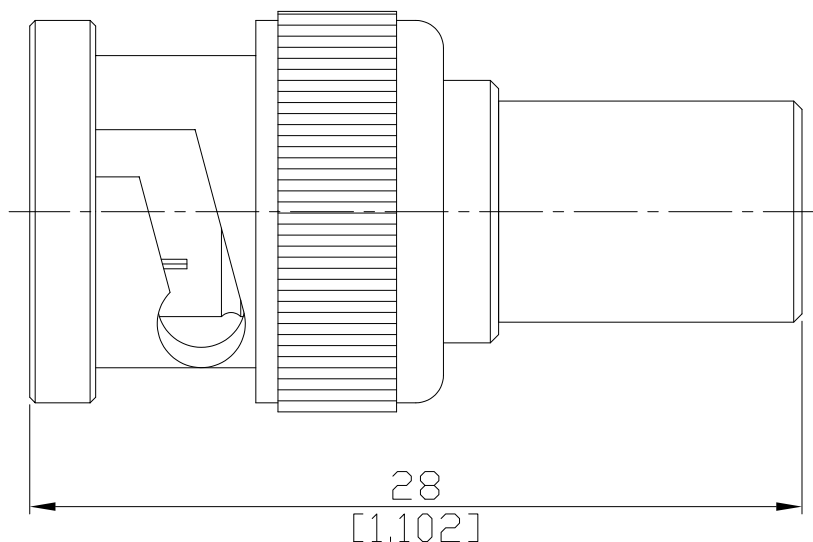

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to MIL-STD-348B/301

**Electrical Data**

Impedance 75  $\Omega$   
Interface frequency max. DC to 1 GHz  
Average power at 25°C 1 W

**Mechanical Data**

Coupling mechanisms Bayonet-lock  
Weight N/A

**Environmental Data**

Temperature range -55°C to +125°C  
RoHS compliant

**Material And Plating**

| Connector parts | Material        | Plating                          |
|-----------------|-----------------|----------------------------------|
| Centre contact  | Brass           | Gold plating(Nickel underplated) |
| Body            | Brass           | Copper-Tin-Zinc Alloy            |
| Insulator       | PTFE            |                                  |
| Gasket          | Silicone Rubber |                                  |
| Coupling nut    | Brass           | Copper-Tin-Zinc Alloy            |

**Packing**

Single or 100