




2 Watt RF Load Up to 40 GHz with 2.92mm Plug (Male) ; VSWR1.15

T-K15-40G2WA / 9XX

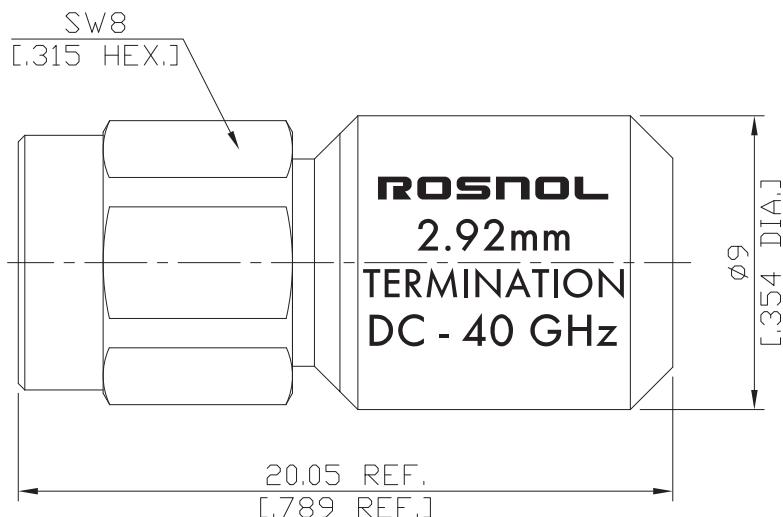

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 61169-35; IEEE Std 287

Electrical Data

Impedance	50 Ω
Frequency	DC to 40 GHz
VSWR (Return Loss)	≤ 1.15 (≥ 23.13 dB)
Average power (at 25°C)	2 W

Material And Plating

Piece Parts	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Passivated

Environmental Data

Temperature Range -55°C to +125°C
RoHS compliant

Packing

Single or 100