


N Terminations Plug

T-N15-10G2WA/133

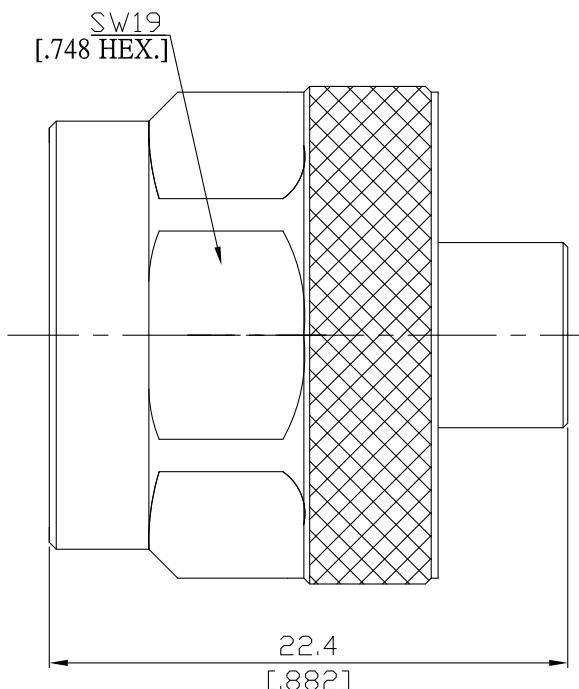

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16; MIL-C-39012; MIL-STD-348A/402; CECC 22210

Electrical Data

Impedance

50 Ω

Frequency

DC to 10 GHz

VSWR (Return loss)

≤ 1.20 (≥ 20.83 dB)

Power rating (Watt)

2 W

Mechanical Data

Coupling mechanisms

Screw-lock

Weight

0.0310 kg

Environmental Data

Temperature range

-55°C to +125°C

RoHS

compliant

Material And Plating

Connector parts

Material

Plating

Centre contact

Brass

Gold plating(Nickel underplated)

Body

Brass

Nickel

Insulator

PTFE

Gasket

Silicone Rubber

Coupling nut

Brass

Nickel

Packing

Single or 100