




1 Watt RF Load Up to 18 GHz With N Male

T-N15-18G1WA / H33

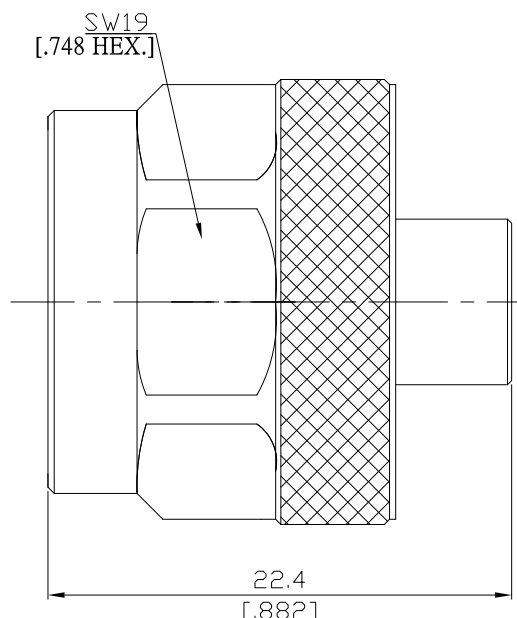

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16; MIL-STD-348A/304

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.25 (≥ 19.08 dB)

Insertion Loss

$\leq 0.05 \times \sqrt{F}$ (GHz) dB

Center Contact Resistance

≤ 1 m Ω

Outer Contact Resistance

≤ 0.25 m Ω

Power handling

1 Watt

Material And Plating

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Body	Brass	Nickel
Insulator	PTFE	
Coupling nut	Brass	Nickel

Mechanical Data

Coupling mechanisms

Screw-lock

Mating Cycles

≥ 500

Coupling Test Torque

max. 1.7 Nm

Recommended Torque

0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range

-55°C to +125°C

RoHS

compliant

Packing

Single or 100

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:
JUL/16/2021

Rosnol RF/Microwave Technology Co., Ltd.

www.rosnol.com; info@rosnol.com

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/1