


## N Terminations Plug 20 Watt

## T-N15-3G20WA/144

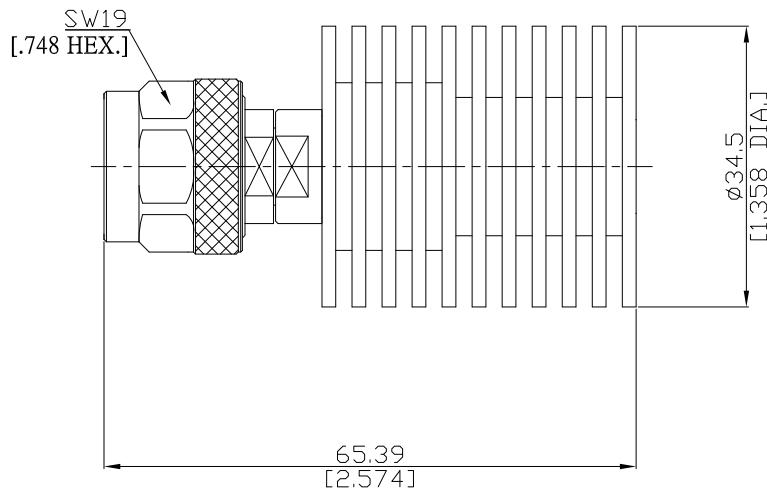

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to IEC 61169-16; CECC 22210; MIL-C-39012; MIL-STD-348A/304

**Natural Convection Cooling Designed**

According to MIL-DTL-39030

**Electrical Data**

Impedance	50 Ω
Frequency	DC to 3 GHz
VSWR (Return Loss)	≤ 1.15 (≥ 23.13 dB)
Power rating (Watt)	20 W at 25°C

**Mechanical Data**

Coupling mechanisms	Screw-lock
Weight	N/A

**Environmental Data**

Temperature range	-55°C to +125°C
RoHS	compliant

**Material And Plating**

Piece Parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Heatsinks	Aluminum	Black anodized

**Packing**

Single