


N(Male) Termination Plug 25 Watt

T-N15-4G25WA/144

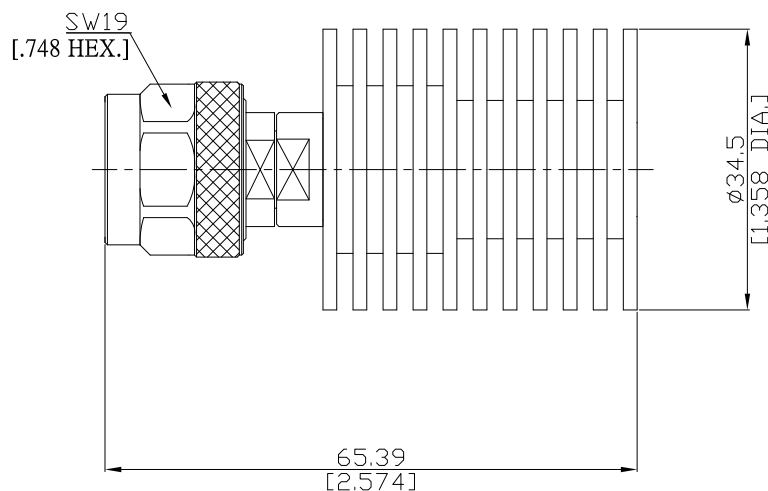

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to IEC 61169-16; MIL-STD-348A/304

**Natural Convection Cooling Designed**

According to MIL-DTL-39030

**Electrical Data**

Impedance 50 Ω

Frequency DC to 4 GHz

VSWR (Return Loss) ≤ 1.15 (≥ 23.13 dB)

Power rating (Watt) 25 W at 25°C

**Mechanical Data**

Coupling mechanisms Screw-lock

Weight N/A

**Environmental Data**

Temperature range -55°C to +125°C

RoHS compliant

**Material And Plating**

| Piece Parts    | Material | Plating                          |
|----------------|----------|----------------------------------|
| Centre contact | Brass    | Gold plating(Nickel underplated) |
| Body           | Brass    | Copper-Tin-Zinc Alloy            |
| Insulator      | PTFE     |                                  |
| Heatsinks      | Aluminum | Black anodized                   |

**Packing**

Single