


N(Male) Termination Plug 10 Watt

T-N15-6G10WA/133

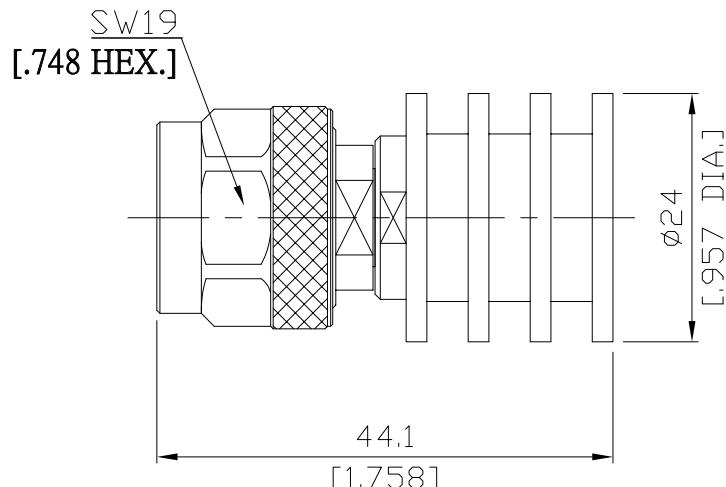

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16; MIL-STD-348A/304

Natural Convection Cooling Designed

According to

MIL-DTL-39030

Electrical Data

Impedance

50 Ω

Frequency

DC to 6 GHz

VSWR (Return Loss)

≤ 1.20 (\geq 20.83 dB)

Power rating (Watt)

10 W at 25°C

Mechanical Data

Coupling mechanisms

Screw-lock

Weight

N/A

Environmental Data

Temperature range

-55°C to +125°C

RoHS

compliant

Material And Plating

Piece Parts

Material

Plating

Centre contact

Brass

Gold plating(Nickel underplated)

Body

Brass

Nickel

Insulator

PTFE

Heatsinks

Aluminum

Black anodized

Packing

Single