


N(Male) Termination Plug 15 Watt

T-N15-6G15WA/144

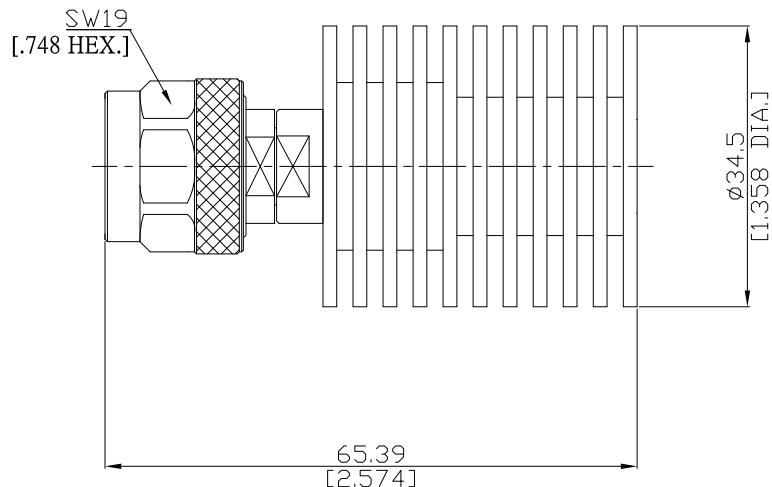

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 61169-16; MIL-STD-348A/304

Natural Convection Cooling Designed

According to MIL-DTL-39030

Electrical Data

Impedance 50 Ω

Frequency DC to 6 GHz

VSWR (Return Loss) ≤ 1.20 (≥ 20.83 dB)

Power rating (Watt) 15 W at 25°C

Mechanical Data

Coupling mechanisms Screw-lock

Weight N/A

Environmental Data

Temperature range -55°C to +125°C

RoHS compliant

Material And Plating

Piece Parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Heatsinks	Aluminum	Black anodized

Packing

Single