


## N Terminations Plug

## T-N15-6G1WA/H44

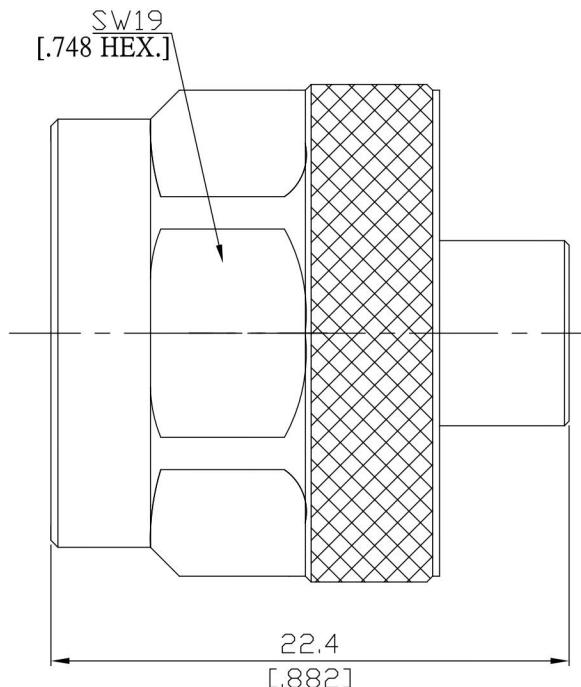

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to IEC 61169-16; MIL-C-39012; MIL-STD-348A/402; CECC 22210

**Electrical Data**

Impedance	50 Ω
Frequency	DC to 6 GHz
VSWR	≤ 1.2
Power rating (Watt)	1 W

**Mechanical Data**

Coupling mechanisms	Screw-lock
Weight	0.0310 kg

**Environmental Data**

Temperature range	-55°C to +125°C
RoHS	compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy

**Packing**

Single or 100