




N (Male) Terminations Plug

T-N15-6G2WA/H44

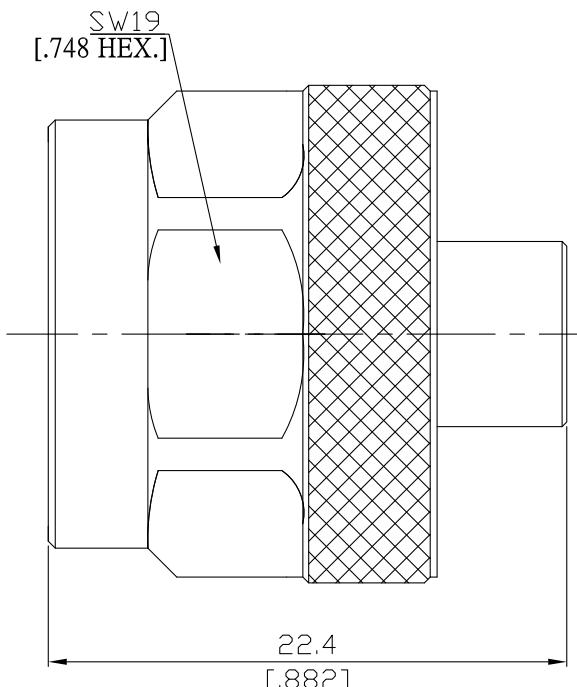

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 61169-16; MIL-STD-348B/304

Electrical Data

| | |
|---------------------|-------------------------|
| Impedance | 50 Ω |
| Frequency | DC to 6 GHz |
| VSWR (Return Loss) | ≤ 1.2 |
| Power rating (Watt) | 2 W at 25°C (sea level) |

Mechanical Data

| | |
|---------------------|------------|
| Coupling mechanisms | Screw-lock |
| Weight | 0.0310 kg |

Environmental Data

| | |
|-------------------|-----------------|
| Temperature range | -55°C to +125°C |
| RoHS | compliant |

Material And Plating

| Connector parts | Material | Plating |
|-----------------|-----------------|----------------------------------|
| Centre contact | Phosphor Bronze | Gold plating(Nickel underplated) |
| Body | Brass | Copper-Tin-Zinc Alloy |
| Insulator | PTFE | |
| Gasket | Silicone Rubber | |
| Coupling nut | Brass | Copper-Tin-Zinc Alloy |

Packing

Single or 100