




**N (Male) Termination Plug
5 Watt, DC-6 GHz, VSWR \leq 1.20**

T-N15-6G5WA/133

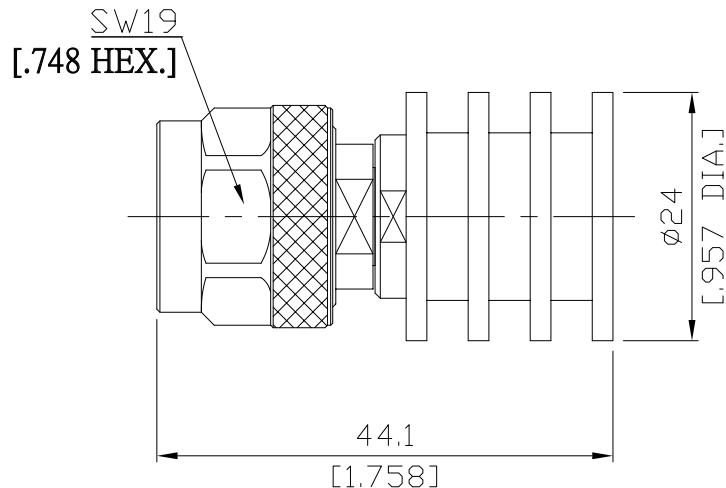

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16; MIL-STD-348B/304

Natural Convection Cooling Designed

According to

MIL-DTL-39030

Electrical Data

Impedance

50 Ω

Frequency

DC to 6 GHz

VSWR (Return Loss)

\leq 1.20 (\geq 20.83 dB)

Power rating (Watt)

5 W at 25°C

Mechanical Data

Coupling mechanisms

Screw-lock

Weight

N/A

Environmental Data

Temperature range

-55°C to +125°C

RoHS

compliant

Material And Plating

Piece Parts

Centre contact

Material

Body

Brass

Insulator

Brass

Heatsinks

PTFE

Plating

Gold plating(Nickel underplated)

Nickel

Black anodized

Packing

Single