
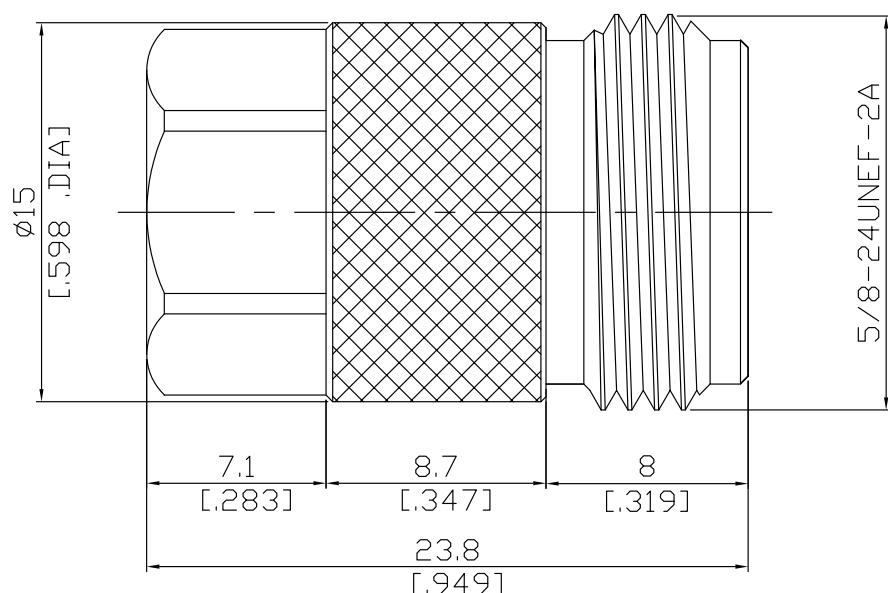


## N Terminations Jack

## T-N25-3G2WA/H4

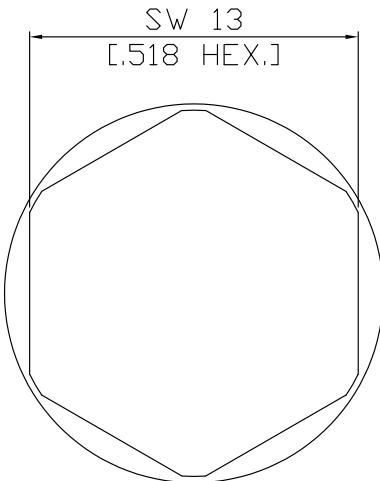

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 61169-16; MIL-C-39012; MIL-STD-348A/304; CECC 22210

**Electrical Data**

Impedance

50 Ω

Frequency

DC to 3 GHz

VSWR (Return loss)

DC to 0.5 GHz: ≤ 1.10 (≥ 26.44 dB)

0.5 to 3 GHz: ≤ 1.15 (≥ 23.13 dB)

Power rating (Watt)

2 W

**Mechanical Data**

Coupling mechanisms

Screw-lock

Weight

N/A

**Environmental Data**

Temperature range

-55°C to +125°C

RoHS

compliant

**Material And Plating**

Connector parts

Material

Plating

Centre contact

Phosphor Bronze

Gold plating(Nickel underplated)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

**Packing**

Single or 100