


300 Watt RF Load Up to 4 GHz With N Female Input
Round Body Black Anodized Aluminum Heatsink

T-N25-4G300WA / H3

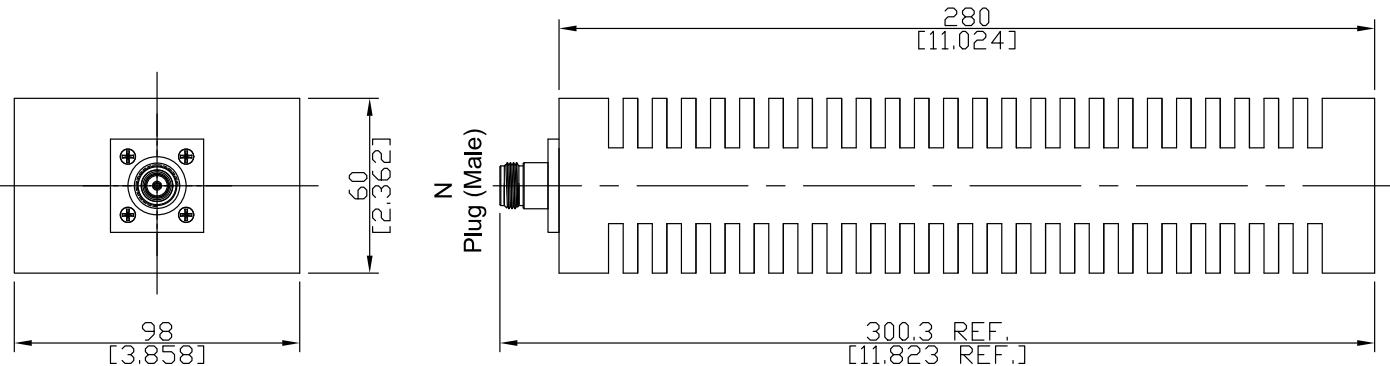

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-16; MIL-STD-348B/304; CECC 22210; MIL-PRF-39012

Electrical Data

Impedance

50 Ω

Frequency

DC to 4 GHz

VSWR (Return Loss)

≤ 1.4 (≥ 15.56 dB)

Power rating (Watt)

300 W at 25°C

Material And Plating

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating
Body	Brass	Nickel
Insulator	PTFE	
Heatsinks	Aluminum	Black anodized

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Coupling Nut Retention	≥ 450 N
Center Contact Captivation: axial	≥ 28 N
Coupling Test Torque	max. 1.7 Nm
Recommended Torque	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-55C to +125°C
RoHS	compliant

Packing

Single or 100