


500 Watt RF Load Up to 6 GHz With N Jack (Female) Input
Round Body Black Anodized Aluminum Heatsink

T-N25-6G500WA / H3

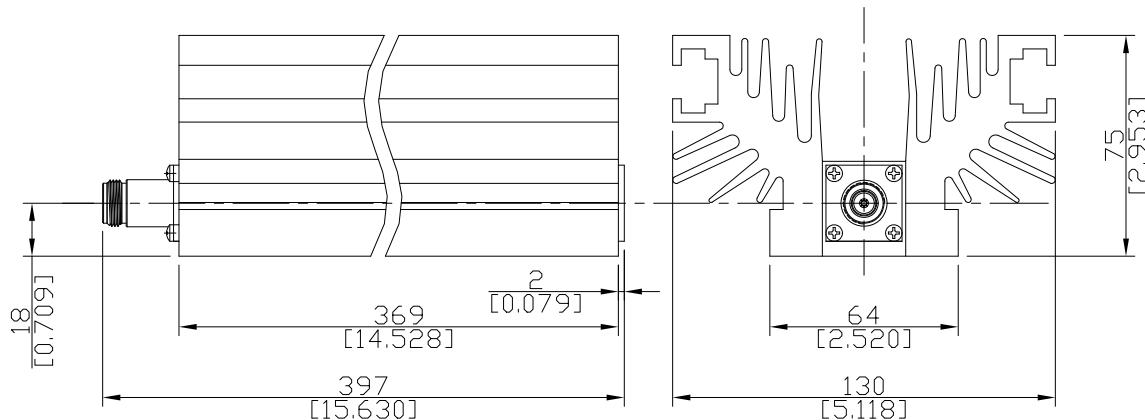

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-16; MIL-STD-348B/304; CECC 22210; MIL-PRF-39012

Electrical Data

Impedance

50 Ω

Frequency

DC to 6 GHz

VSWR (Return Loss)

≤ 1.3 (≥ 17.69 dB)

RF Power Rating

500 Watts Average at 25°C

Material And Plating

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, Nickel underplated
Body	Brass	Nickel
Insulator	PTFE	
Coupling nut	Brass	Nickel
Heatsinks	Aluminum	Black anodized

500 Watt RF Load Up to 6 GHz With N Jack (Female) Input Round Body Black Anodized Aluminum Heatsink

T-N25-6G500WA / H3

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Coupling Nut Retention	≥ 450 N
Center Contact Captivation: axial	≥ 28 N
Coupling Test Torque	max. 1.7 Nm
Recommended Torque	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-55C to +100°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100