


SMP Plug (Male) Termination, Smooth Bore 1W DC-18GHz VSWR1.25

## T-P15-SB18G1WA / 9X

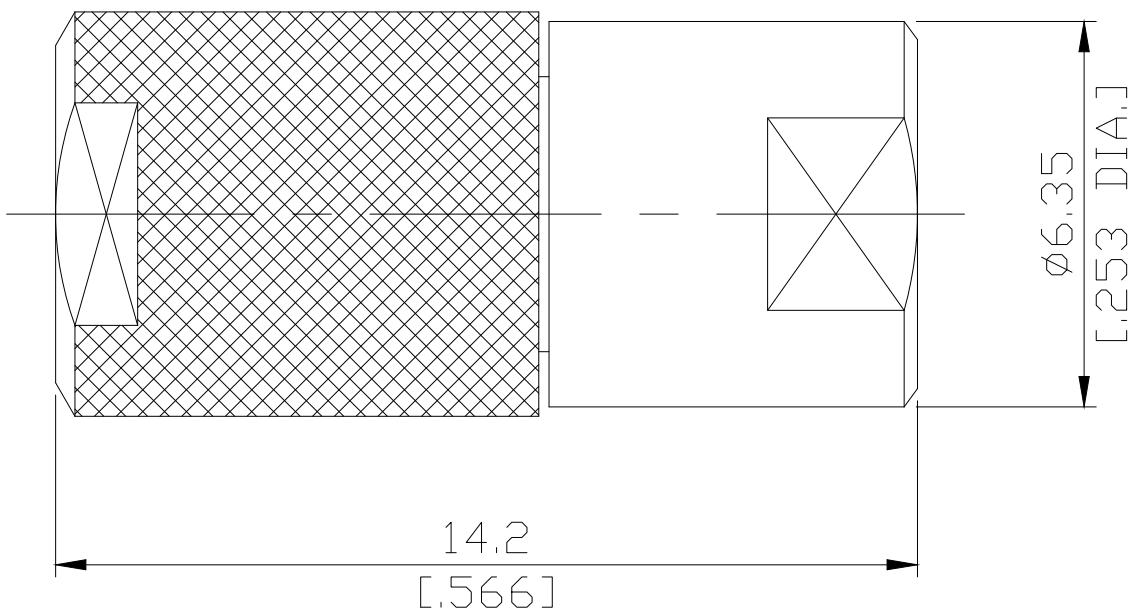

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

according to

MIL-STD-348B/326

**Electrical Data**

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.25 (≥ 19.1 dB)

Average Power (@ 25°C)

1 W

**Material And Plating**

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	

## SMP Plug (Male) Termination, Smooth Bore 1W DC-18GHz VSWR1.25

## T-P15-SB18G1WA / 9X

## Mechanical Data

Coupling mechanisms	Snap-lock
Mating cycles	Smooth bore, Catchers mitt: $\geq 1000$
Center contact captivation: axial	$\geq 7$ N
Engagement force	Smooth bore, Catchers mitt: $\leq 9$ N
Disengagement force	Smooth bore, Catchers mitt: $\geq 2.2$ N

## Environmental Data

Temperature Range	-65°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition A
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

## Packing

Single or 100