




3.5mm Termination Plug

T-PC15-26.5G2WA/9XX

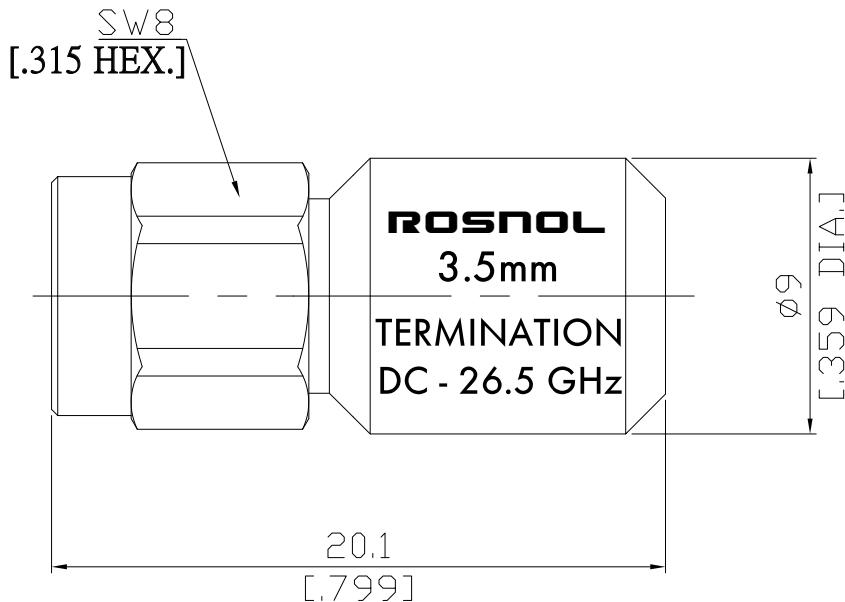

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-23; IEEE Std 287
 Mechanically compatible with SMA and 2.92 mm

Electrical Data

Impedance 50 Ω
 Frequency DC to 26.5 GHz
 VSWR (Return Loss) ≤ 1.15 (≥ 23.13 dB)
 Power rating (Watt) 2 W

Mechanical Data

Coupling mechanisms Screw-lock
 Weight N/A

Environmental Data

Temperature range -40°C to +85°C
 RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PS	
Coupling nut	Stainless Steel	Passivated

Packing

Single