


Precision SMA Terminations Plug

T-PCA15-27G1WA/911

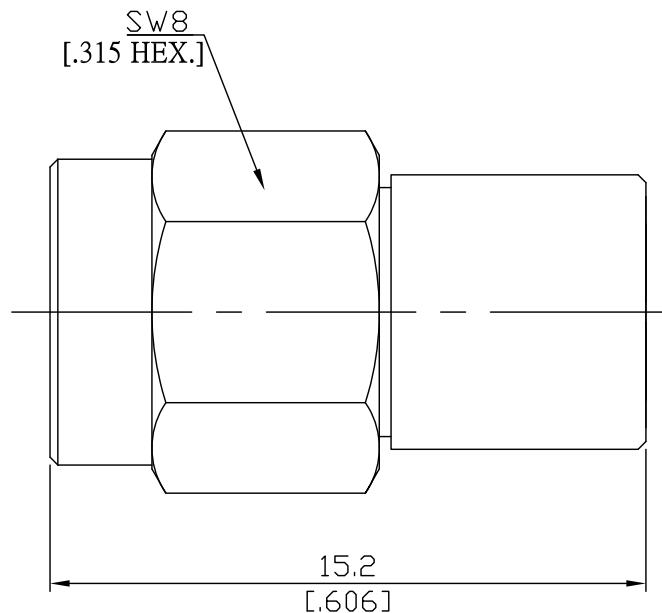

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to N/A

Electrical Data

Impedance 50 Ω

Interface frequency max. DC to 27 GHz

VSWR ≤ 1.2

Power rating (Watt) 1 W

Mechanical Data

Coupling mechanisms Screw-lock

Weight 0.0053 kg

Environmental Data

Temperature range -55 °C to +125 °C

RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Gold plating(Nickel underplated)

Packing

Single or 100