




Precison SMA Terminations Jack

T-PCA25-27G2WA/9X

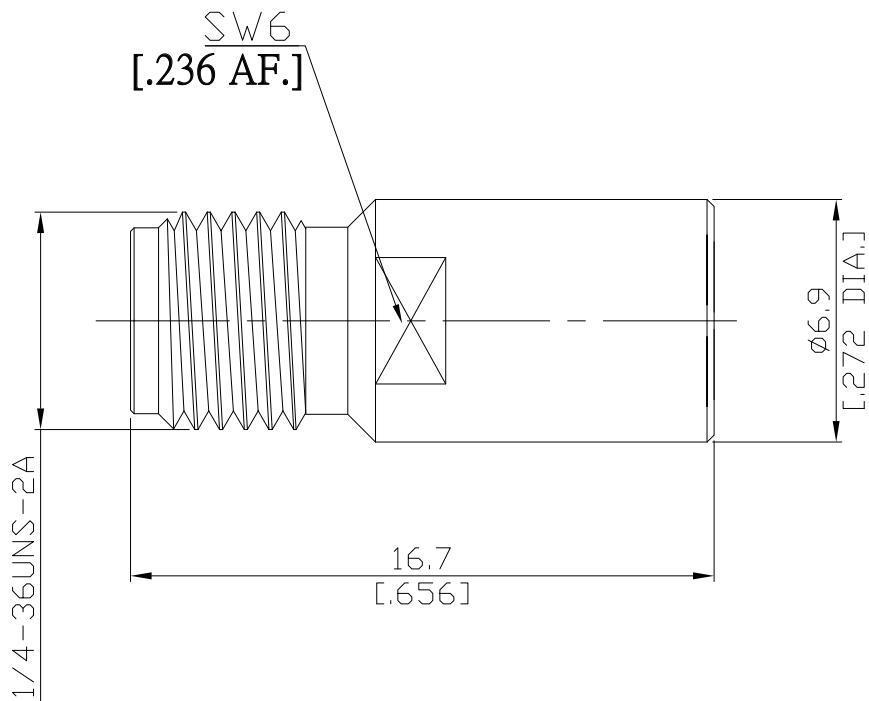

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-15; MIL-C-39012; MIL-STD-348A/310

Electrical Data

Impedance	50 Ω
Frequency	DC to 27 GHz
VSWR	≤ 1.20
Power rating (Watt)	2 W

Mechanical Data

Coupling mechanisms	Screw-lock
Weight	0.0043 kg

Environmental Data

Temperature range	-55°C to +125°C
RoHS	compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	

Packing

Single or 100