




100 Watt RF Load Up to 18 GHz With Precision N Plug (Male) Input  
Round Body Black Anodized Aluminum Heatsink

## T-PCN15-18G100WA / H33

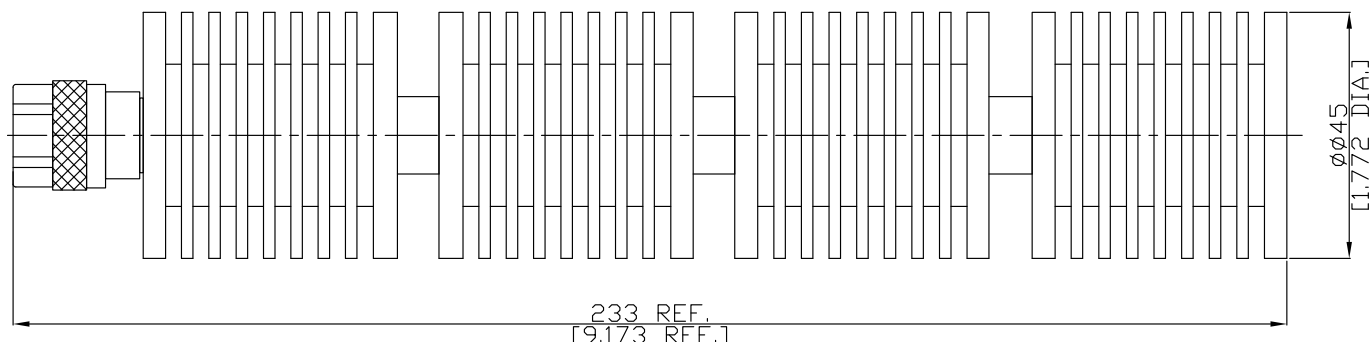

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to

IEC 60169-16; MIL-STD-348/304; CECC 22 210

### Electrical Data

Impedance

50  $\Omega$

Frequency

DC to 18 GHz

VSWR (Return Loss)

$\leq 1.45$  ( $\geq 14.72$  dB)

RF Power Rating

100 Watts Average at 25°C

### Material And Plating

| Piece Parts    | Material        | Plating                          |
|----------------|-----------------|----------------------------------|
| Centre contact | Phosphor Bronze | Gold plating, Nickel underplated |
| Body           | Brass           | Nickel                           |
| Insulator      | PTFE            |                                  |
| Heatsinks      | Aluminum        | Black                            |
| Coupling nut   | Brass           | Nickel                           |
| Heatsinks      | Aluminum        | Black anodized                   |

100 Watt RF Load Up to 18 GHz With Precision N Plug (Male) Input  
Round Body Black Anodized Aluminum Heatsink

**T-PCN15-18G100WA / H33**

**Mechanical Data**

|                                   |                  |
|-----------------------------------|------------------|
| Coupling mechanisms               | Screw-lock       |
| Mating Cycles                     | ≥ 500            |
| Coupling Nut Retention            | ≥ 450 N          |
| Center Contact Captivation: axial | ≥ 28 N           |
| Coupling Test Torque              | max. 1.7 Nm      |
| Recommended Torque                | 0.7 Nm to 1.1 Nm |

**Environmental Data**

|                     |                                 |
|---------------------|---------------------------------|
| Temperature Range   | -55C to +100°C                  |
| Thermal shock       | MIL-STD-202, Meth. 107, Cond. B |
| Corrosion           | MIL-STD-202, Meth. 101, Cond. B |
| Vibration           | MIL-STD-202, Meth. 204, Cond. B |
| Shock               | MIL-STD-202, Meth. 213, Cond. I |
| Moisture Resistance | MIL-STD-202, Method 106         |
| RoHS                | compliant                       |

**Packing**

Single or 100