




**Precision N (Male)
Termination Plug**

T-PCN15-18G1WA/H44

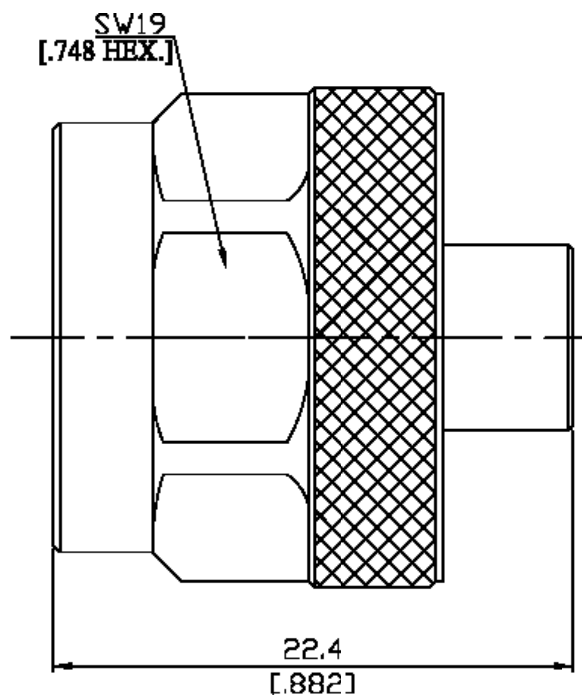

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 61169-16; MIL-STD-348B/402

Electrical Data

Impedance 50 Ω
Frequency DC to 18 GHz
VSWR ≤ 1.20 (≥ 20.83 dB)
Power rating (Watt) 2 W

Mechanical Data

Coupling mechanisms Screw-lock
Weight 0.0310 kg

Environmental Data

Temperature range -55°C to +125°C
RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy

Packing

Single or 100