




Precision N Terminations Jack

T-PCN25-18G2WA/H4

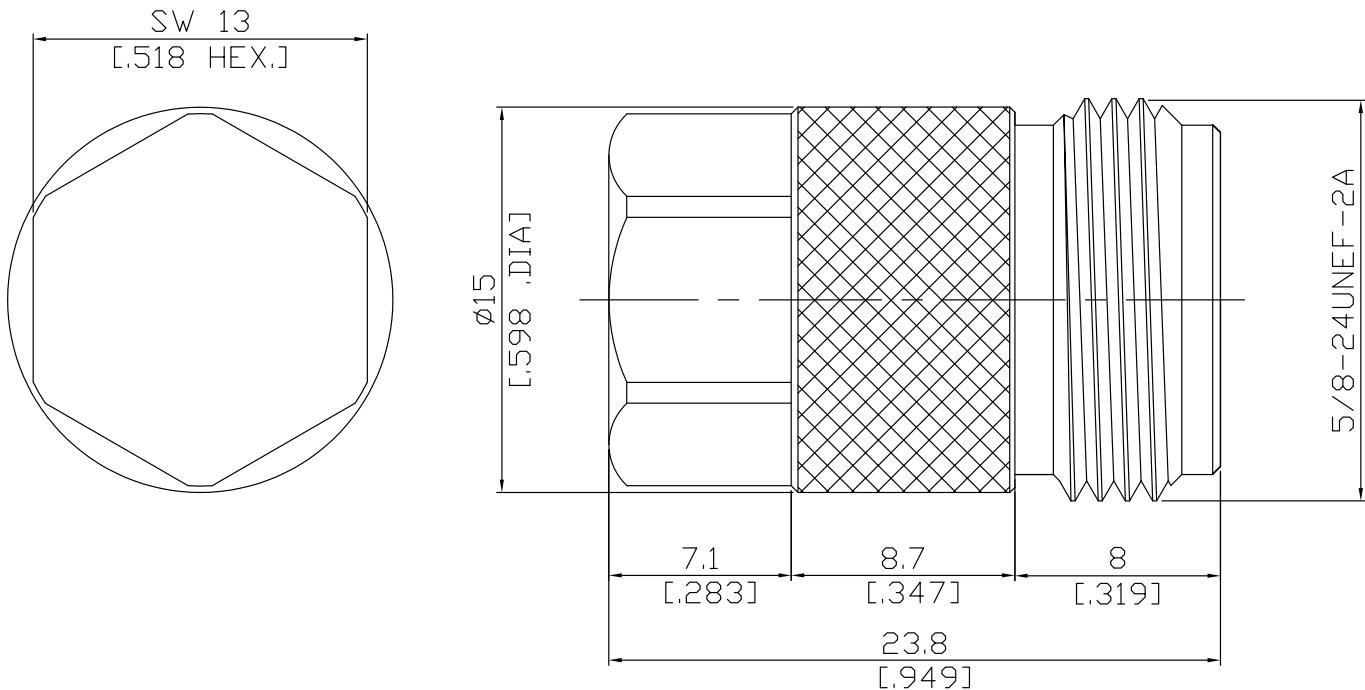

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 61169-16; MIL-C-39012; MIL-STD-348A/402; CECC 22210

**Electrical Data**

Impedance 50 Ω

Frequency DC to 18 GHz

VSWR ≤ 1.20 (≥ 20.83 dB)

Power rating (Watt) 2 W

**Mechanical Data**

Coupling mechanisms Screw-lock

Weight N/A

**Environmental Data**

Temperature range -55°C to +125°C

RoHS compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

**Packing**

Single or 100