




SMPM Termination Jack
18 GHz, 0.25 Watt

T-PM25-18G0.25WA/99

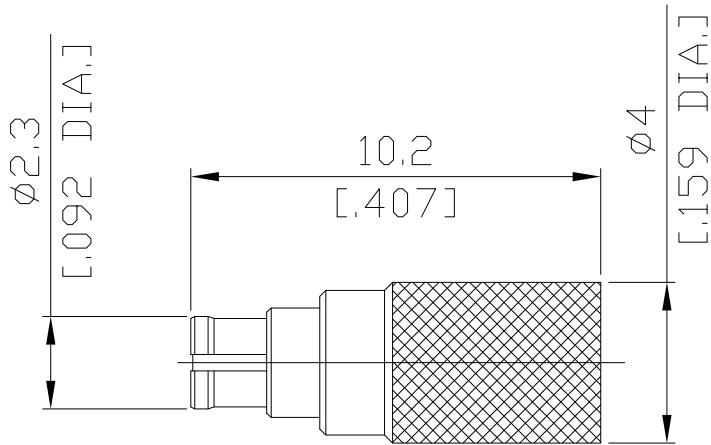

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

MIL-STD-348A/328

Mateable with GPO™ (Gilbert Engineering Co., Inc)

Electrical Data

Impedance

50 Ω

Interface frequency max.

DC to 18 GHz

VSWR (Return loss)

≤ 1.35 (≥ 16.54 dB)

Power rating (Watt)

0.25 W

Mechanical Data

Coupling mechanisms

Snap-On

Weight

N/A

Environmental Data

Temperature range

-45°C to +125°C

RoHS

compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Beryllium Copper	Gold plating(Nickel underplated)
Insulator	PTFE	

Packing

Single