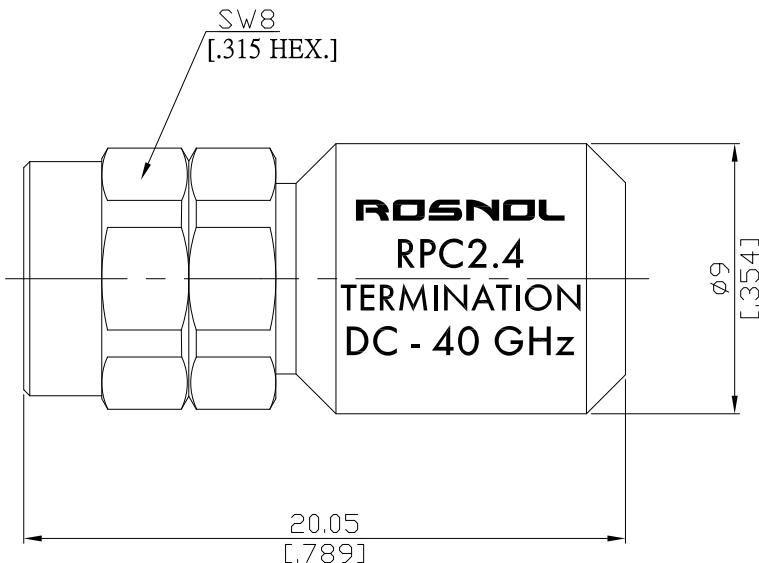


**RPC2.4 Termination Plug**
**T-Q15-40G1WA/9XX**


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to IEEE STD 287  
Mechanically compatible with 1.85 mm

**Electrical Data**

Impedance 50 Ω  
Frequency DC to 40 GHz  
VSWR (Return Loss) ≤ 1.12 ( $\geq$  24.94 dB)  
Power rating (Watt) 1 W

**Mechanical Data**

Coupling mechanisms Screw-lock  
Weight N/A

**Environmental Data**

Temperature range -40°C to +85°C  
RoHS compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PS	
Coupling nut	Stainless Steel	Passivated

**Packing**

Single