


TNC Plug (Male) Termination, 2 W, DC-6 GHz, VSWR 1.25

T-T15-6G2WA / 9XX

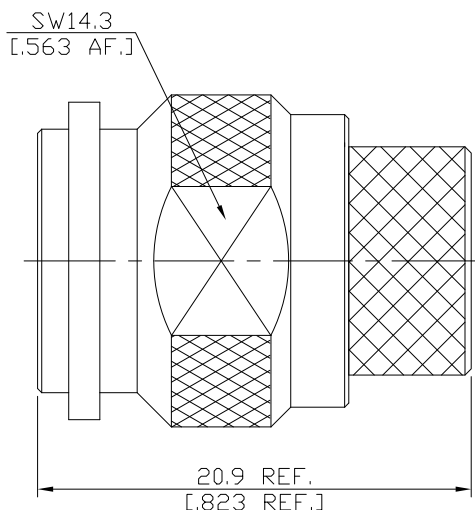

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-17; CECC 22200; MIL-PRF-39012; MIL-STD-348B/313; DIN EN 122200

Electrical Data

Impedance

50 Ω

Frequency

DC to 6 GHz

VSWR (Return Loss)

≤ 1.25 (≥ 19.08 dB)

Average Power at 25°C

2 W

Material And Plating

Piece Parts	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated

Mechanical Data

Coupling Mechanisms	Screw-On
Mating Cycles	≥ 500
Center Contact Captivation	≥ 27 N
Coupling Test Torque	max. 1.7 Nm
Recommended Torque	0.46 Nm to 0.69 Nm

Environmental Data

Temperature Range	-55°C to +155°C
RoHS	Compliant

Packing

Single or 100