


TNC Jack (Female) Termination, 2 W, DC-2 GHz, VSWR 1.2

T-T25-2G2WA / H4

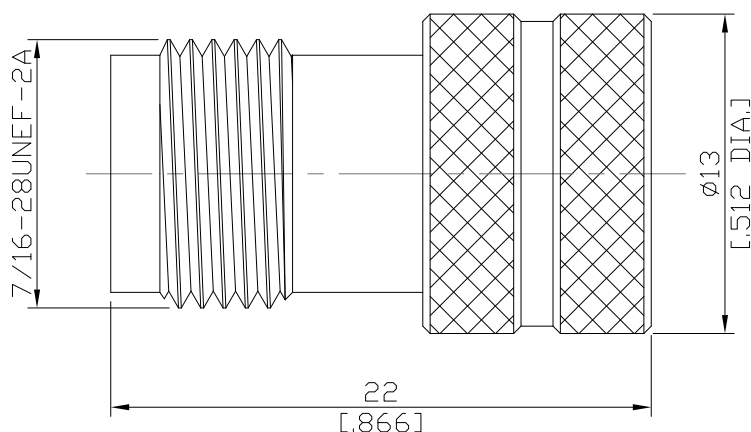

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-17; CECC 22200; MIL-PRF-39012; MIL-STD-348B/313; DIN EN 122200

Electrical Data

Impedance

50 Ω

Frequency

DC to 2 GHz

VSWR (Return Loss)

≤ 1.2 (≥ 20.83 dB)

Average Power at 25 °C

2 W

Material and Plating

Piece Parts	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

Mechanical Data

Coupling Mechanisms

Screw-On

Mating Cycles

≥ 500

Center Contact Captivation

≥ 15 N

Coupling Test Torque

max. 1.7 Nm

Recommended Torque

0.46 Nm to 0.69 Nm

Environmental Data

Temperature Range

-55 °C to +125 °C

RoHS

Compliant

Packing

Single or 100