


TNC Jack (Female) Termination, 10 W, DC-4 GHz, VSWR 1.20

T-T25-4G10WA / H3

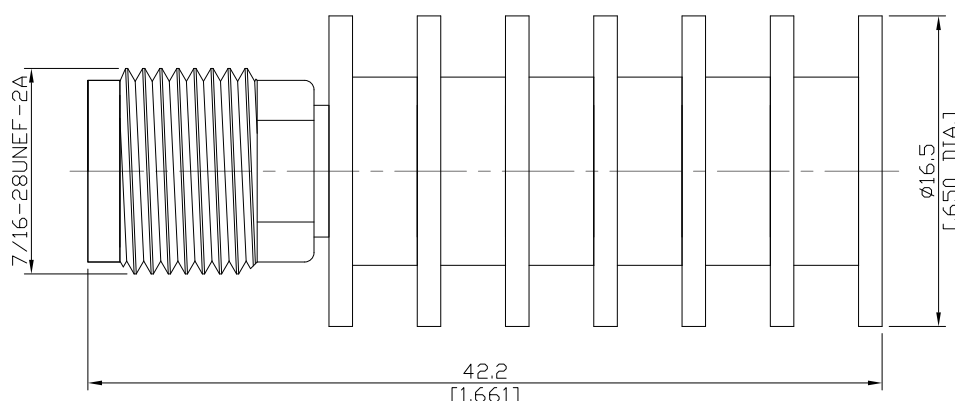

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-17; CECC 22200; MIL-PRF-39012; MIL-STD-348B/313; DIN EN 122200

Electrical Data

Impedance

50 Ω

Frequency

DC to 4 GHz

VSWR (Return Loss)

≤ 1.2 (≥ 20.83 dB)

Average power at 25°C

10 W

Material And Plating

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating
Body	Brass	Nickel
Insulator	PTFE	
Heatsink	Aluminum	Black anodized

Mechanical Data

Coupling Mechanisms	Screw-On
Mating Cycles	≥ 500
Center Contact Captivation	≥ 27 N
Coupling Test Torque	max. 1.7 Nm
Recommended Torque	0.46 Nm to 0.69 Nm

Environmental Data

Temperature Range	-55°C to +100°C
RoHS	compliant

Packing

Single or 100