




1.85mm (Male) Termination Plug,  
2 W, DC-67 GHz, VSWR  $\leq$  1.30

T-V15-67G2WA/9XX

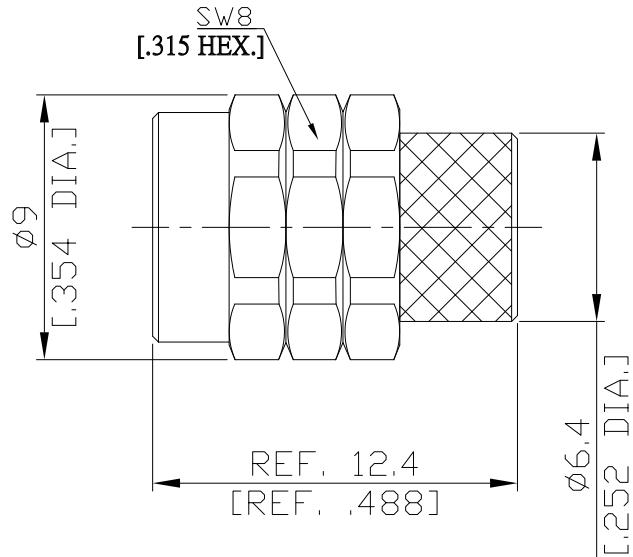

All dimensions are in mm [inch]

#### Interface

According to IEC 61169-32; IEEE Std 287-2007

#### Electrical Data

Impedance 50  $\Omega$   
Frequency DC to 67 GHz  
VSWR (Return Loss)  $\leq$  1.30 ( $\geq$  17.69 dB)  
Power rating (Watt) 2 W

#### Mechanical Data

Coupling mechanisms Screw-lock  
Weight N/A

#### Environmental Data

Temperature range -55°C to +125°C  
RoHS compliant  
Relative humidity 0-90%

#### Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PEI	
Coupling nut	Stainless Steel	Passivated

#### Packing

Single