



 1.85mm (Female) Termination Jack,  
 2 W, DC-67 GHz, VSWR ≤ 1.30

T-V25-67G2WA/9X

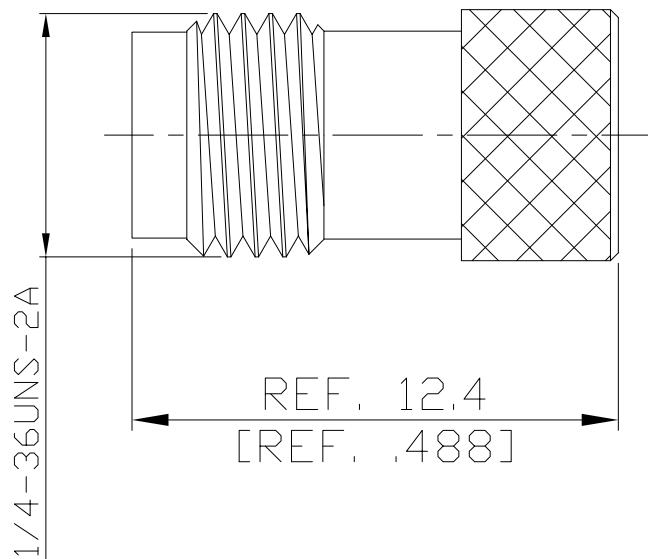

All dimensions are in mm [inch]

**Interface**

According to

IEC 61169-32; IEEE Std 287-2007

**Electrical Data**

Impedance	50 Ω
Frequency	DC to 67 GHz
VSWR (Return Loss)	≤ 1.30 (≥ 17.69 dB)
Power rating (Watt)	2 W

**Mechanical Data**

Coupling mechanisms	Screw-lock
Weight	N/A

**Environmental Data**

Temperature range	-55°C to +125°C
RoHS	compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PEI	

**Packing**

Single