


2 Watt 1.00mm Plug (Male) Termination Load, Stainless Steel Passivated
DC-110GHz VSWR1.6

T-W15-110G2WA / 9XX

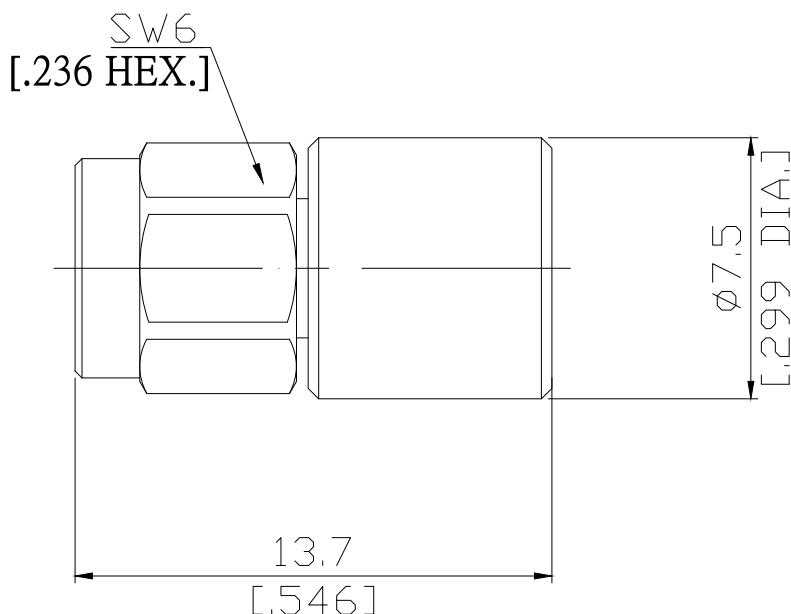

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 61169-31; IEEE Std 287-2007
Mechanically compatible with SMA and 3.5 mm

Electrical Data

Impedance 50 Ω
Frequency DC to 110 GHz
VSWR (Return Loss) ≤ 1.6 (≥ 12.7 dB)
Power rating (Watt) 2 W

Mechanical Data

Coupling mechanisms Screw-lock
Weight N/A

Environmental Data

Temperature range -55°C to +125°C
RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PEI	
Coupling nut	Stainless Steel	Passivated

Packing

Single