


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N		Length (mm)
PC1E50-EF402-PC1E50-100A/26G		100
Frequency	VSWR Max.	Insertion Loss Max.
26 GHz	1.25	$\leq 0.00535 \text{ (dB/mm)} * L \text{ (mm)} + 0.1 \text{ (dB)}$

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	JAN/22/2024	

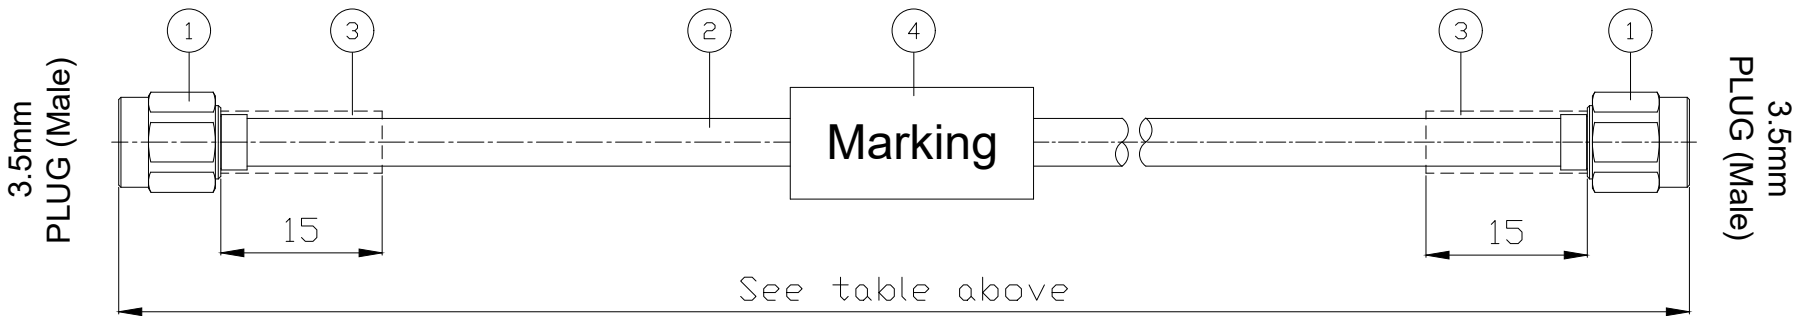

NOTES:
1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
2) MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC-26 GHz
PC1E50-EF402-PC1E50-100A/26G

4	LABEL HEAT SHRINK TUBE	HST-W-D6-125C-G	1	EA	DIMENSION ARE IN MM [INCH] TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°	CUSTOMER	REV -	UNIT mm [inch]
3	HEAT SHRINK TUBE	HST-B-D4-125C	2X 15	mm		APPROVED	DATE	
2	CABLE	ROSNOL EF402A	100	mm				
1	3.5mm SOLDER PLUG	PC1E50-0141A/9XX	2	EA		DRAWN	DATE	
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M				

ROSNOL 
RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
3.5mm Plug (Male) to 3.5mm Plug (Male) 0.1 Meter Cable Assembly for EF402 Cable
DRAWING NO.
PC1E50-EF402-PC1E50-100A/26G