



 Fixed Attenuator 2 Watt
 SMA plug (male) / SMA jack (female)

FA-A1A25A-12.4G2W40/911-91

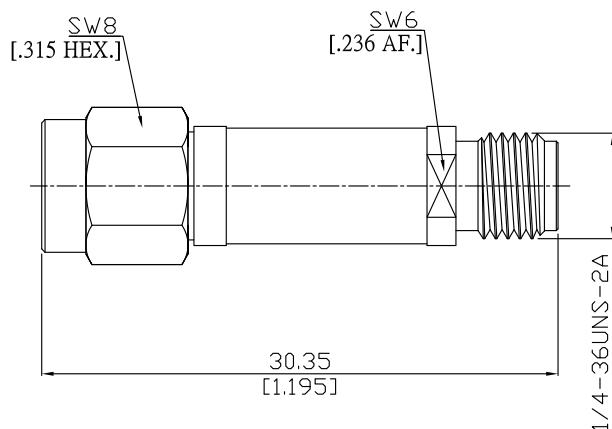

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-15; MIL-C-39012; MIL-STD-348A/310

Electrical Data

Impedance	50 Ω
Interface frequency max.	DC to 12.4 GHz
VSWR (Return Loss)	≤ 1.30 (≥17.69 dB)
Power handing (Watt)	2 Watts average to 25°C

Maximum Deviation Over Frequency

Nominal ATTN (dB)	Deviation (dB)
40.50.60	±0.5

Mechanical Data

Coupling mechanisms	Screw-lock
Weight	N/A

Environmental Data

Temperature range	-55°C to +85°C
RoHS	compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Gold plating(Nickel underplated)
Resistor	Thick film	

Connector parts

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	

Packing

Single or 100

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only..
 In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:

 Date:
 19/11/10

 Rosnol RF/Microwave Technology
www.rosnol.com ; info@rosnol.com
 Phone:+886-3-463-5095
 Fax:+886-3-463-5952

Page

1/1