




Fixed Attenuator 2.92mm Male To 2.92mm Female Up To 40 GHz Rated To 40 Watts  
With Black Anodized Aluminum Heatsink Body

**FA-K1K25A-40G40W30 / 9XX-9X**

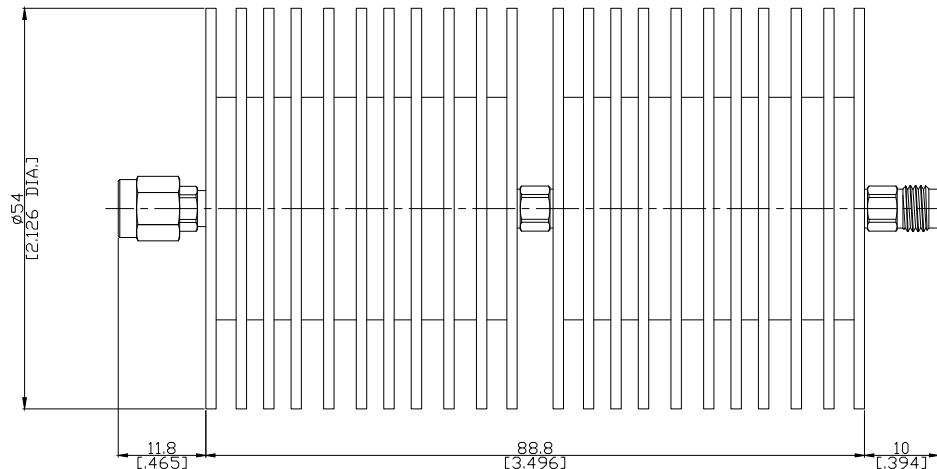

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

#### Interface

According to

IEC 60169-15; MIL-STD-348A/310

#### Electrical Data

Impedance

50 Ω

Frequency

DC to 40 GHz

Input Power

40 Watts, Average at 25°C

PEAK: 200 Watts

Frequency (GHz)	40
VSWR	1.35
Nominal Attenuation (dB)	30
Deviation (± dB)	-2.0/+3.0

#### Material And Plating

Piece Parts	Material	Plating
Centre Contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Passivated
Piece Parts	Material	Plating
Centre Contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:  
12/7/2020

Rosnol RF/Microwave Technology Co., Ltd.

[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

Fixed Attenuator 2.92mm Male To 2.92mm Female Up To 40 GHz Rated To 40 Watts  
 With Black Anodized Aluminum Heatsink Body

## FA-K1K25A-40G40W30 / 9XX-9X

**Mechanical Data**

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Coupling Nut Retention	≥ 270 N
Center Contact Captivation: axial	≥ 20 N
Coupling Test Torque	1.70 Nm max.
Recommended Torque	0.9 Nm

**Environmental Data**

Temperature Range	-55°C to + 125°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

**Packing**

Single or 100