


Fixed Attenuator Precision N Male To Precision N Female Up To 18 GHz
Rated To 100 Watts

FA-PCN1PCN25A-18G100W30 / H33-H3

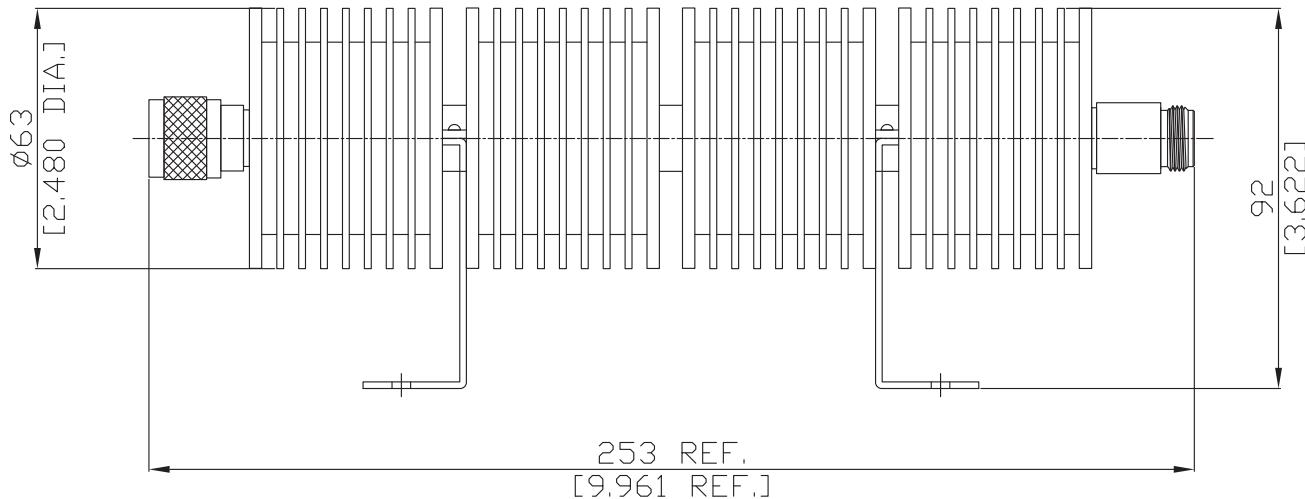

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-16; MIL-STD-348/304; CECC 22 210

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.4 (≥ 15.56 dB)

Power Rating

100 Watts Average at 25 °C

Accuracy Of Attenuation & Power

Nominal Attenuation (dB)	30
Deviation (± dB)	1.0

Material And Plating

Piece Parts (Precision N)	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Brass	Nickel
Heatsink	Aluminum	Black anodized
Piece Parts (Precision N)	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Rosnol RF/Microwave Technology Co., Ltd.

www.rosnol.com; info@rosnol.com

Date:
DEC/3/2024

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

Fixed Attenuator Precision N Male To Precision N Female Up To 18 GHz
Rated To 100 Watts

FA-PCN1PCN25A-18G100W30 / H33-H3

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Coupling Nut Retention	≥ 450 N
Center Contact Captivation: axial	≥ 28 N
Coupling Test Torque	1.70 Nm max.
Recommended torque	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-55°C to + 125°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100