


SMA (Female) Straight Panel Receptacle Jack  
 4-Hole Flange, Coaxial End, DC-18 GHz

SMA2GFA50-2950C/91

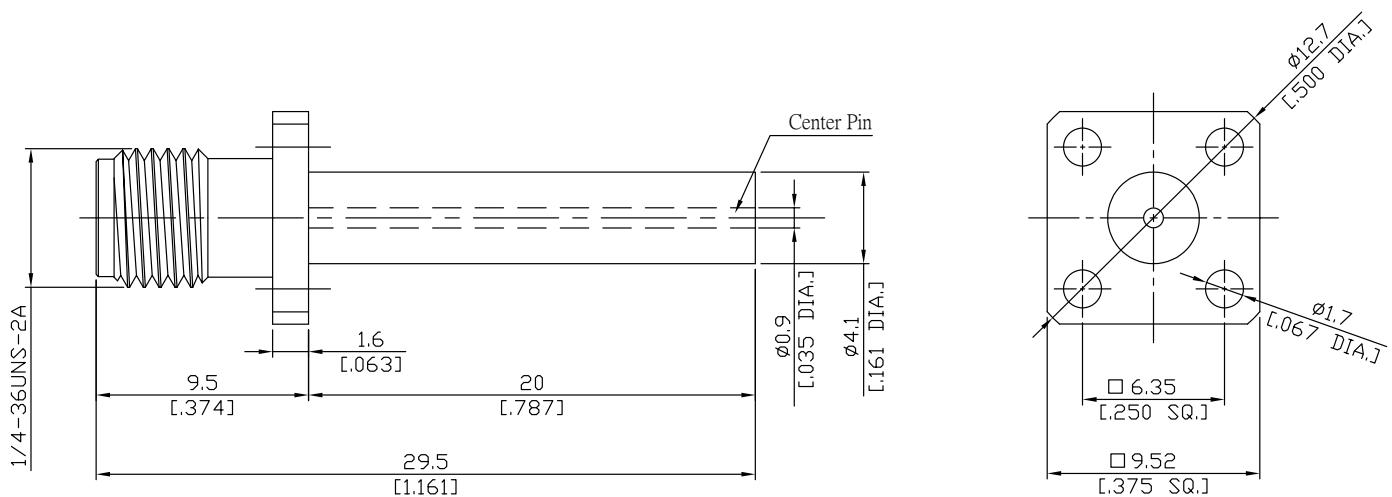

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 60169-15; MIL-STD-348B/310

**Electrical Data**

Impedance 50 Ω

Frequency DC to 18 GHz

 VSWR (Return Loss) ≤ 1.20 ( $\geq 20.83$  dB)

 Insertion Loss  $\leq 0.03 \times \sqrt{F} \text{ (GHz)} \text{ dB}$ 
**Mechanical Data**

Coupling mechanisms Screw-lock

Weight N/A

**Environmental Data**

Temperature range -65°C to +165°C

RoHS compliant

**Material And Plating**

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	

**Packing**

Single or 100

**Related Document**

Mounting Dimension MD71

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:

Rosnol RF/Microwave Technology Co., Ltd.

[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)

Date: 19/11/10 Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001:2015 Certified

Page

1/1