



**SMA Jack (Female)Right Angle Connector Solder Attachment 2 Hole Flange Mount  
Stub Terminal, 12.22mm (.481 inch) Hole Spacing DC-18GHz VSWR1.30**

## SMA2GTA59-1640A / 9Q

Mounting Dimensions



	mm		inch	
	Max.	Min.	Max.	Min.
A	0.8	0.7	.032	.028
B	2.8	2.7	.119	.106
C	12.27	12.17	.483	.479

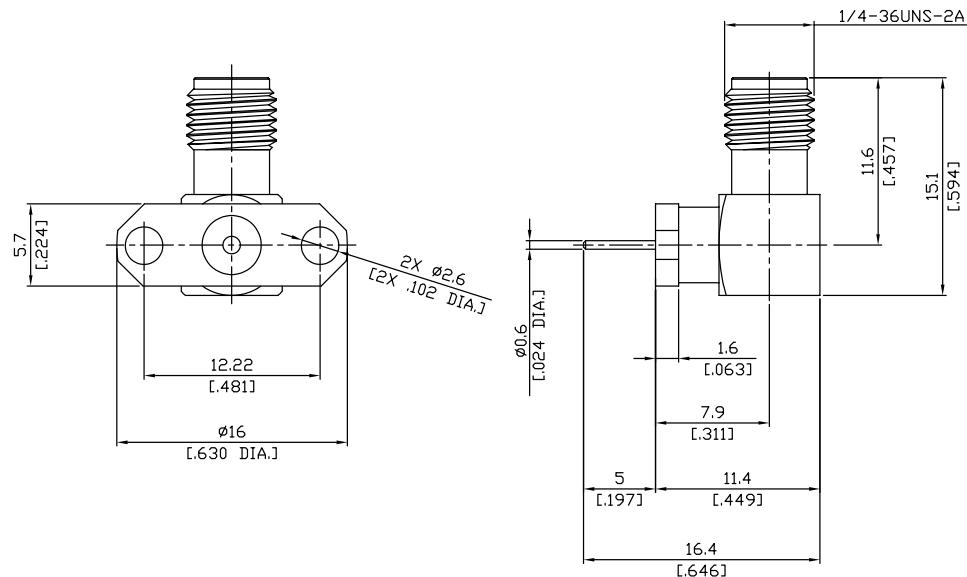

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to

IEC 61169-15; MIL-STD-348B/310

### Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.30 (≥ 17.7 dB)

Insertion Loss

≤ 0.05 x √f (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 3 mΩ

Outer Contact Resistance

≤ 2 mΩ

Test Voltage

1000 V rms

Working Voltage (at sea level)

480 V rms

Power Handling (at 20 °C, sea level, VSWR 1.0)

≤ 200 W @ 2 GHz

### Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

 Rev.:-  
 Date:  
 JUL/16/2021

 Rosnol RF/Microwave Technology Co., Ltd.  
[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)  
 Phone: +886-3-463-5095 / Fax: +886-3-463-5952  
 N-CAGE Code: SFKK0 / ISO9001 Certified

 Page  
 1/2

SMA Jack (Female)Right Angle Connector Solder Attachment 2 Hole Flange Mount  
Stub Terminal, 12.22mm (.481 inch) Hole Spacing DC-18GHz VSWR1.30

**SMA2GTA59-1640A / 9Q**

## Mechanical Data

## Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond.D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

## Packing

Single or 100